

Desktop PC Power Supply PCSFE-250P-X2S

Domestic Sales Only, Economical SFX 12V Power Supply



PCSFE-250P-X2S

**RoHS
Directive**

SFX	
Continuous Max. 200W	Peak Power 250W

Model	Description	Stock
PCSFE-250P-X2S		Standard stock

Model Name Coding
PCSFE - 250 P - X 2 S *
 ① ② ③ ④ ⑤ ⑥ ⑦

1. Series name	4. ATX output
2. Output power	5. +3.3V output equipped
3. Peak output compliant	6. Standard
	7. Modification code

Features

- Low-cost version SFX12V power supply
- 0A (zero amp.) as min. load for +5V output
- S-ATA connector equipped
- FAN speed monitoring signal output equipped
- No PFC circuit responding to Low-cost

Introduction of modified products: For 200 VAC input system

Modify product of PCSFE-250P-X2S

Input voltage has been modified to 200 VAC system from 100 VAC system

■Model: PCSFE-250P-X2S2

■Input voltage: 200 / 240 VAC (180 - 264 VAC)

■Output

Output voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. current/ max. power (continuous)	5A	18A	5A	0.3A	1.0A
	Total 110A				
	Total 170W				
Peak current/ peak power (5 sec max.)	5A	18A	10A	0.3A	1.5A
	Total 220A				
	Total 231.1W				
Min. current	0A	0A	0.3A	0A	0A

*Min. lot is 50 pcs: Lead time 100days

Please ask for detail

Refer to "Product Page Guideline" on p.13

Safety standard / Approval	UL	CSA	EN	CE	CCC
Reliability Grade	HFA	FA	HOA	OA	

Function

DC start	RS 232C	USB	TTL	PFC	Silence	5VSB FAN	T5FC FAN	Connection	RoHS
----------	---------	-----	-----	-----	---------	----------	----------	------------	------

Input

AC input	90 - 120V
----------	-----------


Output

Output voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. current/ max. power (continuous)	12A	12A	12A	0.3A	1.0A
	Total 70W				
	Total 189.8W				
Peak current/ peak power (5 sec max.)	12A	12A	14A	0.3A	1.5A
	Total 237.8W				
	Total 248.9W				
Min. current	0A	0A	0.3A	0A	0A

Dimensions

W×H×D (mm)	100×63.5×125 (SFX12V APPENDIX D size)
------------	---------------------------------------

Output connector




General Specification Condition: at normal temperature and humidity unless otherwise specified

Items		Specification					Measurement conditions, etc.	
AC Input	Rated Voltage	100 VAC (90 - 120 VAC)						
	Input Frequency	50 / 60Hz					47 - 63Hz	
	Efficiency	72% typ. *Characteristic data: Fig.2					At rated input/output	
	Power Factor	65% typ. *Characteristic data: Fig.3						
	Inrush Current	40A max. *Characteristic data: Fig.4					At rated input/output at cold start (25°C)	
Input VA	520VA max. *Characteristic data: Fig.3					At rated input and max. output		
Output	Rated Voltage	+3.3V	+5V	+12V	-12V	+5VSB		
	Rated Current	6A	10A	10A	0.3A	1.0A		
	Max. Current / Power	12A	12A	12A	0.3A	1.0A	Max. output power: 198.4W	
		70W max.						
	Peak Current / Power	189.8W max.			0.3A	1.5A	Peak output power: 248.9W (5 sec max.)	
		12A	12A	14A				
			237.8W max.					
	Min. Current	0A	0A	0.3A	0A	0A		
	Total Voltage Accuracy (%)	±5 max.	±5 max.	±5 max.	±6 max.	±5 max.	Total accuracy of temperature, input, and load fluctuations	
Max. Ripple Voltage (mVp-p)	50 max.	50 max.	120 max.	120 max.	50 max.	Two wires are coming out from the output connector and connected into one at the edge of 50cm max. long. 10µF electrolytic capacitor and 0.1µF film capacitor are placed on it and it is measured by the 100MHz oscilloscope. *Characteristic data: Fig.12		
Max. Spike Voltage (mVp-p)	100 max.	100 max.	150 max.	120 max.	100 max.			
Protection	Overcurrent Protection	OCP Point (A)	13.2 min.	13.2 min.	14 min.	Short protection		
		Method	All outputs except for +5VSB shutdown			Hold down current limiting		
		Recovery	Reclosing AC input (5 sec min. interval)			Automatic recovery		
	Overvoltage Protection	OVP Point (V)	3.7 - 4.3	5.7 - 7.0	13.4 - 15.6	-	-	
		Method	All outputs except for +5VSB shutdown			-	-	
		Recovery	Reclosing AC input (10 sec min. interval)			-	-	
All other outputs are at rated input/output.							However, in measuring +3.3V, +5V load shall be 2.7A with rated load for other outputs	
Environment	Operating Temp. / Humidity		0 to 60°C* / 10 to 90%				*Refer to Fig.1 No condensation	
	Storage Temp. / Humidity		-25 to 70°C / 10 to 95%					
	Vibration		Displacement amplitude: 0.15mm (10-55Hz), Sweep cycles: 10, Test duration: 45 minutes each axis				JIS-C-60068-2-6	
	Mechanical Shock		Lift one bottom edge up to 50mm and let it fall. Number of bumps: 3 each of 4 edges				JIS-C-60068-2-31 at no operation	
Insulation	Dielectric Strength		AC input - DC output/FG: 1500 VAC for 1 minute				Cut-off current: 10mA	
	Insulation Resistance		AC input - DC output/FG: 50MΩ min.				At 500 VDC	
	Leakage Current		0.5mA max. (100 VAC) *Characteristic data: Fig.5				YE.W. TYPE3226 (1kΩ) or equivalent	
EMC	Line Noise Immunity		± 2000V (pulse width: 100/1000ns, repetitive cycle: 10-50ms)				No malfunction	
	Electrostatic Discharge		EN61000-4-2 compliant					
	Radiated, Radio-Frequency EM Field		EN61000-4-3 compliant					
	Fast Transient Burst		EN61000-4-4 compliant					
	Lightning Surge		EN61000-4-5 compliant					
	RF Conducted Immunity		EN61000-4-6 compliant					
	Magnetic Field Immunity		EN61000-4-8 compliant					
	Voltage Dip / Regulation		EN61000-4-11 compliant					
	Conducted Emission		VCCI-A compliant *Characteristic data: Fig.6					
Others	Safety Standard		The Electric appliance and Material Safety Law compliant					
	Cooling System		Forced air cooling					
	Output Grounding		Connected chassis (FG)					
	Output Hold-up Time		PWR_OK holds up 16ms min. after AC failure *Characteristic data: Fig.9				At output power of 160W	
	Reliability Grade		FA (industrial equipment grade, double-sided through hole PCB)				Follow our standard	
	MTBF		100,000 H min.				Based on EIAJ RCR-9102	
	Warranty		3 years after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost.				Except for errors caused by operation no listed	

Fig.1 Temperature Derating

When the ambient temperature (near the airflow inlet) exceeds 40°C, follow the derating curve to derate rated current/power, max. current/power, and peak current/power.

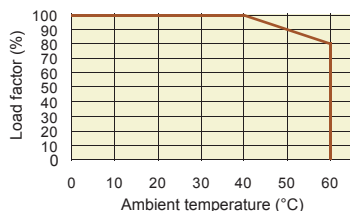

BRAIN Power Supply

Desktop PC Power Supply

Non-backup Power Supply

Signal Input / Output Specification Condition: at normal temperature and humidity unless otherwise specified

Items	Specification	Note
Input Signal	Output ON / OFF Control Signal (PS_ON#)	+3.3V, +5V, +12V, and -12V outputs shutdown with 'H' or 'OPEN' input.
	+3.3V SENSE	The input terminal to detect the voltage of +3.3V output; by connecting to the load terminal, only the line drop of the + side of the output cable is compensated.
Output Signal	Normal Output Signal (PWR_OK)	'H' signal is delivered when the +5V output is normal (detection delay time: 100 - 500ms).
	Fan Monitor Signal (FAN M)	Two cycle pulses per one rotation of the fan motor are delivered (open collector output). Duty ratio of the pulse shall be 0.5 typ. (Interval between the signals becomes longer at low speed and shorter at high speed.) The signal remains 'L' or 'OPEN' when the fan stops caused by any failure or malfunction.



Signal Circuit		
Input Signal Circuit	Output Signal Circuit	
<p>(PS_ON#)</p>	<p>(PWR_OK)</p>	<p>(FAN M)</p>

BRAIN Power Supply


Desktop PC Power Supply

Non-backup Power Supply

Internal Structure

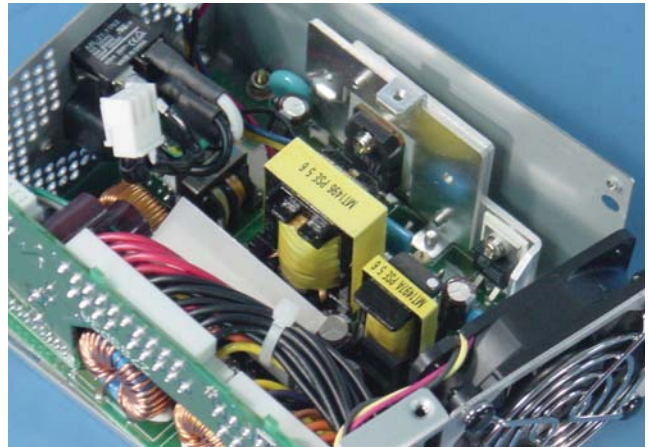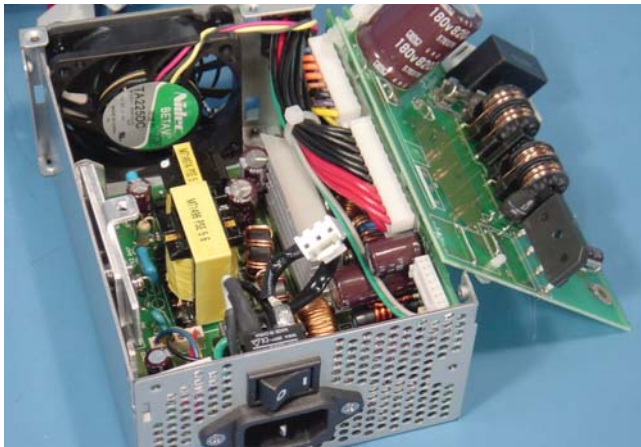


Sequence Diagram

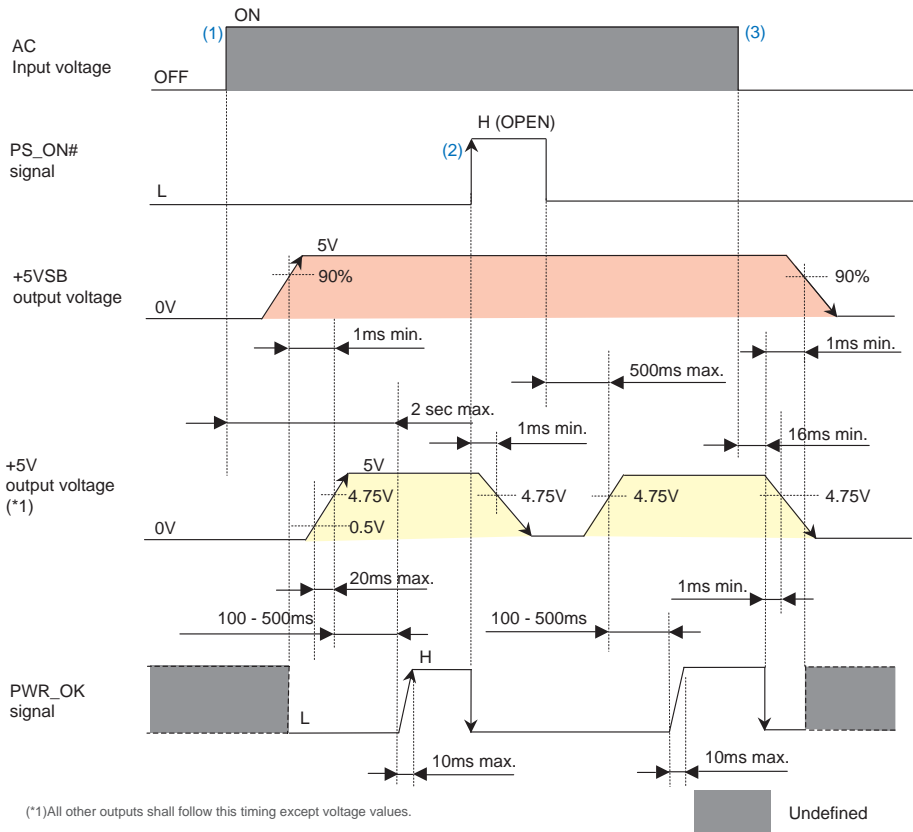

- (1) All outputs start up by being supplied AC input under the condition of PS_ON# 'L'. PWR_OK goes to 'H' at 100 - 500ms after +5V output has risen.
- (2) At PS_ON# 'H' (OPEN) input, +5V output shuts down
- (3) PWR_OK turns to 'L' after 16ms or longer from blackout. 1ms later than this event, the +5V and +5VSB outputs shut down.

Block Diagram

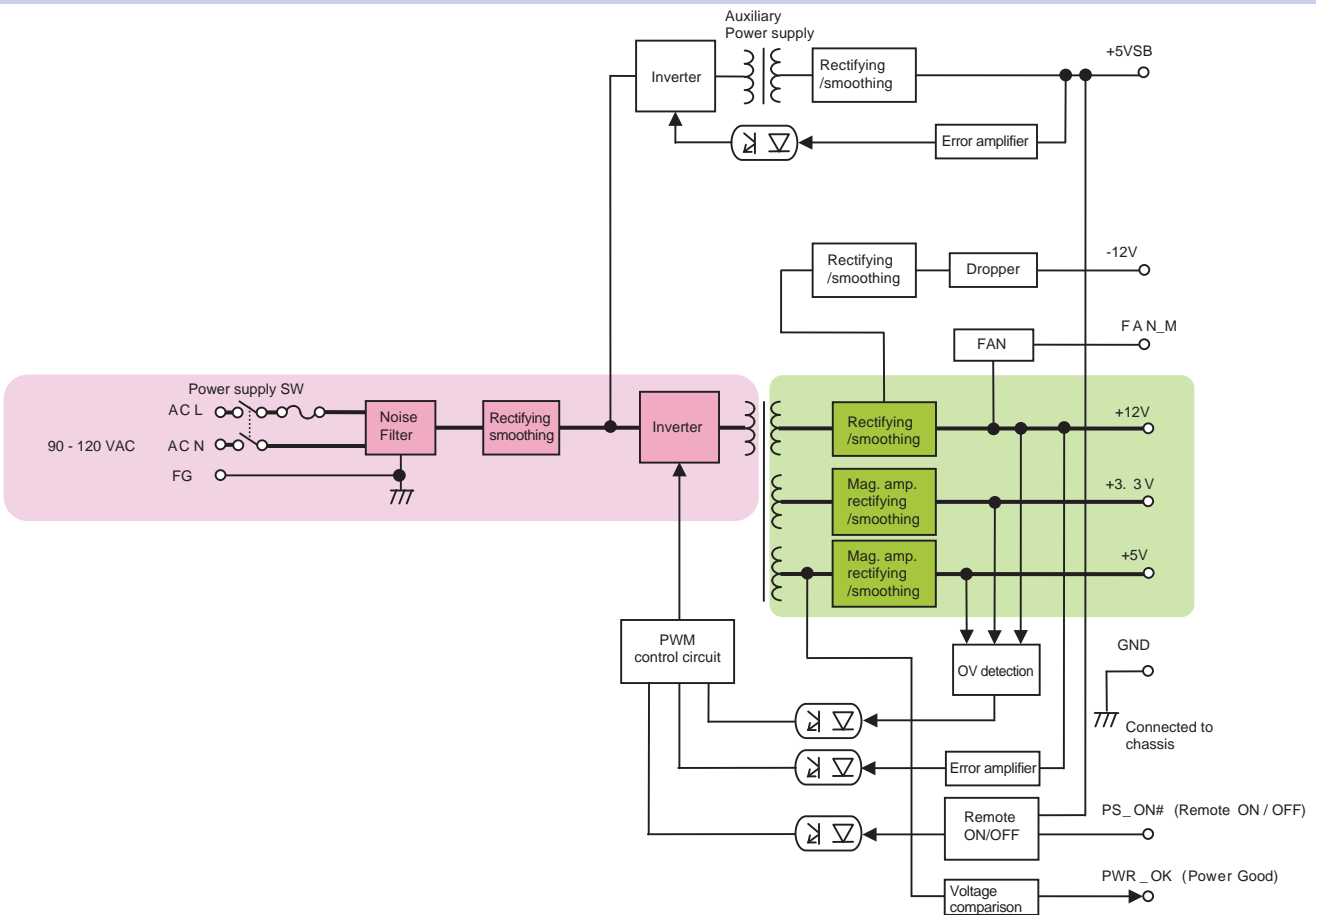


BRAIN Power Supply
Desktop PC Power Supply
Non-backup Power Supply

Outline Drawing / Output Harness

BRAIN Power Supply

Desktop PC Power Supply

Non-backup Power Supply

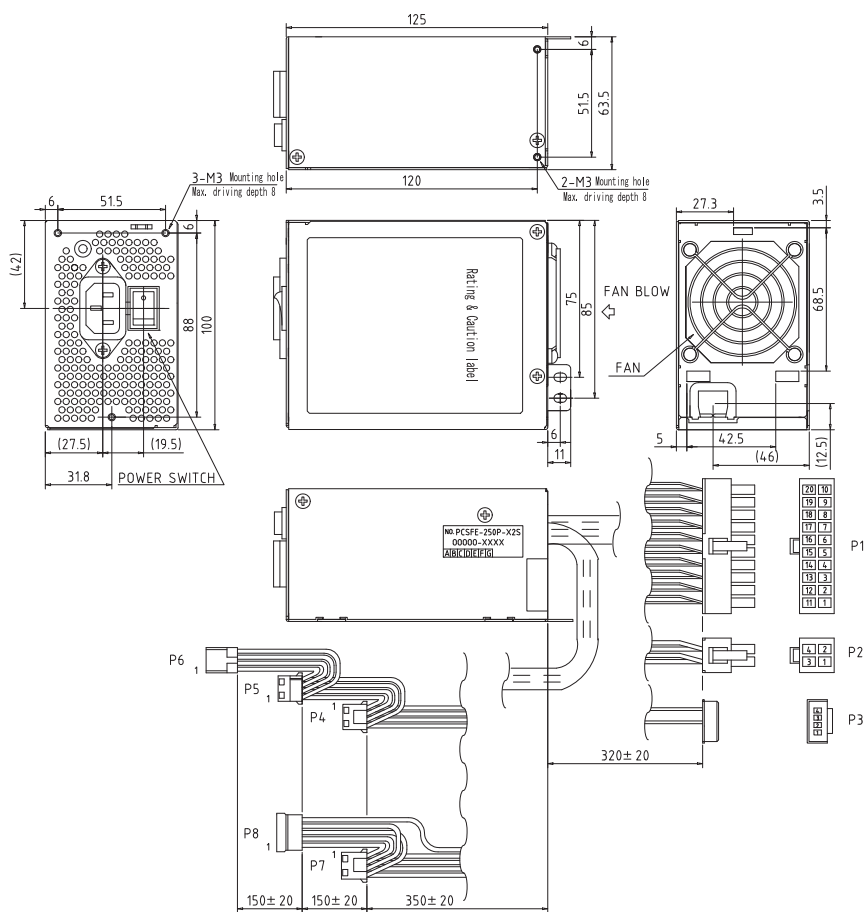





CON NAME	PIN No.	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
P1	1	+3.3VDC	ORANGE	UL1007	Housing:CP-01120030 (CivLux) Terminal:CP-01100102 (CivLux) or equivalent
	2	+3.3VDC	ORANGE		
	3	COM	BLACK		
	4	+5VDC	RED		
	5	COM	BLACK	AWG#18	
	6	+5VDC	RED		
	7	COM	BLACK		
	8	PWR-OK	GRAY	AWG#22	
	9	+5V SB	PURPLE	AWG#18	
	10	+12VDC	YELLOW	AWG#18	
	11	+3.3VDC	ORANGE	AWG#18	Terminal:CP-01100105 (CivLux)
	12	-12VDC	BLUE	AWG#18	Terminal:CP-01100105 (CivLux)
	13	COM	BLACK		
	14	PS-ON#	GREEN	AWG#22	
	15	COM	BLACK		
	16	COM	BLACK		
	17	COM	BLACK	AWG#18	
	18	NC			
	19	+5VDC	RED		
	20	+5VDC	RED		
P2	1	COM	BLACK		
	2	COM	BLACK	AWG#20	
	3	+12VDC	YELLOW		
	4	+12VDC	YELLOW		
P3	1	NC			Housing:XAP-04V-1 (JST) Contact: SXA-001T-P0.6(JST) or equivalent
	2	COM	BLACK	AWG#22	
	3	NC			
	4	FAN-ON	BROWN		
P4	1	COM	BLACK		Housing: LCP-04(JST)
P5	2	COM	BLACK		Contact: SLC22T-2.0(JST)
P7	3	COM	BLACK	AWG#18	or equivalent
	4	+5VDC	RED		
	1	+5VDC	RED		
	2	COM	BLACK	AWG#22	
P6	3	COM	BLACK		Housing:171822-4(AMP)
	4	+12VDC	YELLOW		Contact:170204-1(AMP)
	1	+12VDC	YELLOW		or equivalent
	2	+5VDC	RED		
P8	Wire 1	+12VDC	YELLOW		Housing:675820000(Molex) Contact:675810000(Molex) or equivalent
	Wire 2	COM	BLACK		
	Wire 3	+5VDC	RED		
	Wire 4	COM	BLACK		
	Wire 5	+3.3VDC	ORANGE		

Mounting portion tolerance: ± 0.5
Dimensional tolerance shall be ± 1 unless otherwise specified.

■ Installation direction
The unit can be installed in any directions.

Optional Components Sold Separately

Cable			
Picture	Model	Type	Description
	WH2753	AC power cord	125 VAC 12A [PSE]
	WH2753-02	AC power cord	125 VAC 12A (tracking resistance type) [PSE]

Parts / Unit			
Picture	Model	Type	Description
	ACC2837	Attachment panel	Attachment panel to ATX power supply mounting surface (W×H [mm] =150×86)
	ACC2838	Attachment panel	Attachment panel to SFX12V APPENDIX C size mounting surface (W×H [mm] =125×63.5)

Other Optional Components			
Model	Description	Model	Description
ACC2637	Automatic startup unit	WH5105	12V 4-pin connector conversion harness (80mm)
WH2820	20-pin extension harness (600mm)	WH5105-02	12V 4-pin connector conversion harness (320mm)
WH2747	20-pin extension harness (450mm)	WH5055	AT connector conversion harness
WH2892-02	20-pin extension harness (200mm)	ACC5046	Harness with PS_ON switch
WH2812	PCI-E 6-pin connector conversion harness	ACC5077	PS_ON terminal short connector
		WH5073	PS_ON terminal short 20-pin harness

BRAIN
Power
Supply

Desktop PC Power Supply


Non-backup Power Supply

Characteristics Data (Examples of actual measurement)


BRAIN Power Supply
Desktop PC Power Supply

Non-backup Power Supply


• Fig.2 Efficiency / Input Current vs. Output Power

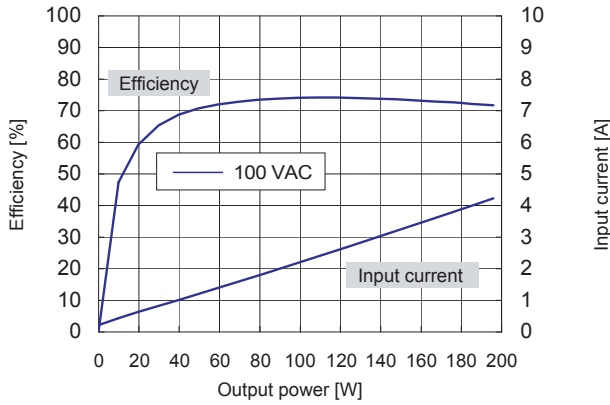

• Fig.3 Power Factor / Input VA vs. Output Power

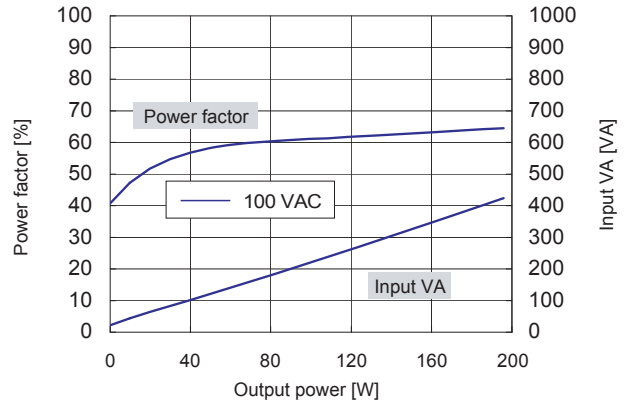

• Fig.4 Inrush Current

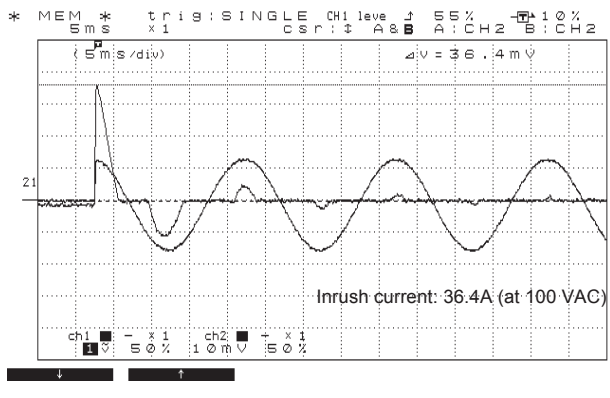


• Fig.5 Leakage Current


Input: 100 VAC
Load: Rated and min. load

	Rated load	Min. load
100 VAC	0.26mA	0.28mA


• Fig.6 Conducted Emission at 100 VAC

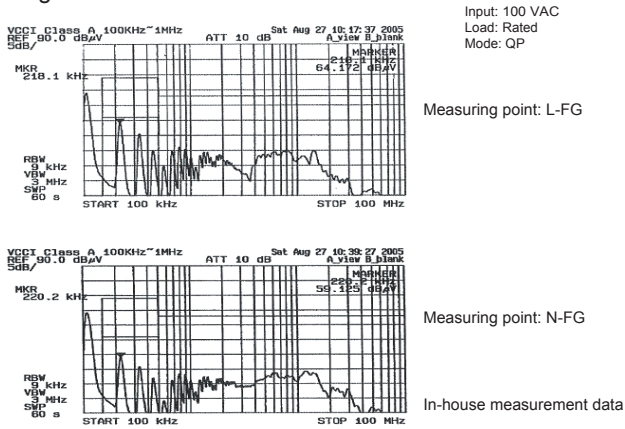


• Fig.7 Rising Characteristics at 100 VAC

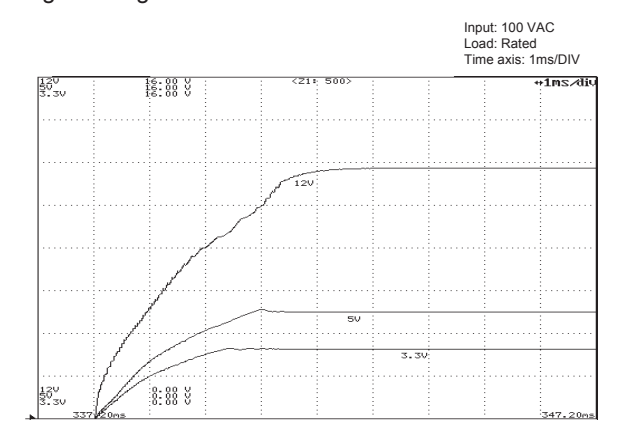

• Fig.8 Falling Characteristics at 100 VAC when REMOTE goes Off

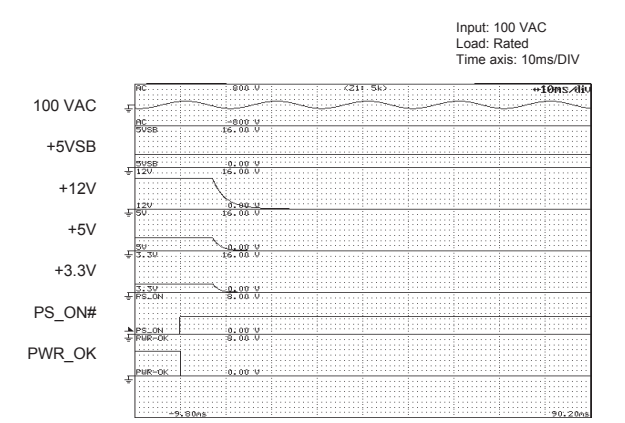


• Fig.9 Output Hold-up Time vs. Output Power

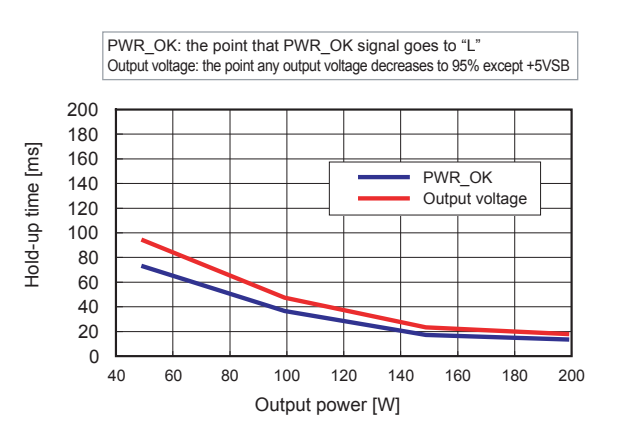

Characteristics Data (Examples of actual measurement)

● Fig.10 Dynamic Load Fluctuation Characteristics at 1kHz

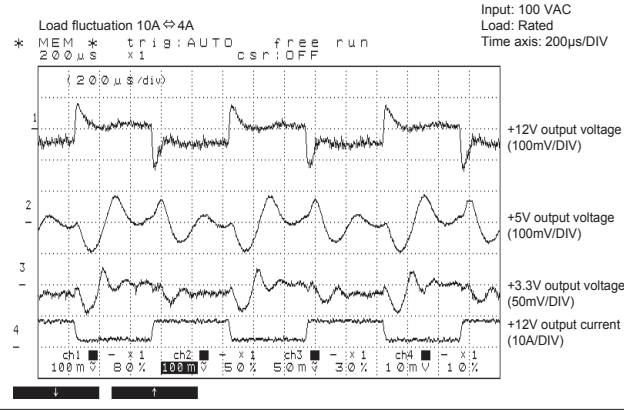


● Fig.11 Output Voltage Regulation

Output	Min. load	Rated load	Peak load
+12V output	0.3A	10A	14A
+5V output	0A	10A	12A
+3.3V output	0A	6A	12A

AC input voltage	90 VAC	100 VAC	120 VAC
+12V output (min. load)	11.914 V	11.913 V	11.911 V
+12V output (rated load)	11.772 V	11.770 V	11.765 V
+12V output (peak load)	11.742 V	11.738 V	11.729 V
+5V output (min. load)	5.122 V	5.122 V	5.121 V
+5V output (rated load)	5.012 V	5.012 V	5.011 V
5V output (peak load)	5.010 V	5.009 V	5.008 V
+3.3V output (min. load)	3.387 V	3.387 V	3.387 V
+3.3V output (rated load)	3.290 V	3.290 V	3.290 V
+3.3V output (peak load)	3.257 V	3.257 V	3.257 V

● Fig.12 Ripple and Spike Voltage

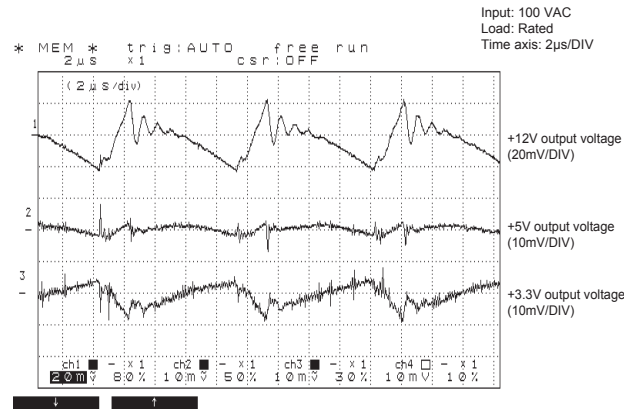

● Fig.13 Ambient Temperature vs. Expected Service Life

■ Electrolytic capacitors

Input: 100 VAC
 Load: Rated
 Operating time: 24 consecutive hours

Intake air temp.	20°C	30°C	40°C
Expected service life (yr)	approx. 42	approx. 21	approx. 10

※ Lifetime shall be 15 years at longest due to deterioration of sealing plates.

■ Fan

Ambient temp.	20°C	30°C	40°C
Expected service life (yr)	approx. 7.8	approx. 7.8	approx. 7.8

● Fig.14 Over Current Protection (V-I Characteristic)

