

Desktop PC Power Supply ePCSA-650P-E2S

650W High Power EPS 12V Power Supply



ePCSA-650P-E2S

**RoHS
Directive**

ATX/EPS
Continuous Max. **550W** Peak Power **650W**

| Model | Description | Stock |
|---|-------------|----------------|
| ePCSA-650P-E2S | | Standard stock |
| ■Model Name Coding ePCSA - 650 P - E 2 S ① ② ③ ④ ⑤ ⑥ | | |
| 1. Series name 4. EPS output 2. Output power 5. +3.3V output equipped 3. Peak output compliant 6. Standard | | |

Features

- High efficiency 80% at 240 VAC
- All outputs equipped with voltage regulation circuit individually. 0A (Zero amp) as min. load for all outputs. Driving stably with brand new high performance CPU.
- 650W high peak power EPS power supply
- By building in the thermal-sensing variable speed fan, noise reduction can be realised. Heat related issue for CPU can be settled with fan speed changeover switch.
- Removable cooling FAN
- Output harnesses can be easily customized to meet various requirements.

Refer to "Product Page Guideline" on p.13

| | | | | | |
|----------------------------|-----|-----|-----|----|-----|
| Safety standard / Approval | UL | CSA | EN | CE | CCC |
| Reliability Grade | HFA | FA | HOA | OA | |

Function



Input

| | |
|----------|-----------------------------|
| AC input | 85 - 264V (worldwide range) |
|----------|-----------------------------|


Output

| Output voltage | +3.3V | +5V | +12V1 | +12V2 | +12V3 | -12V | +5VSB |
|--|------------|-----|------------|-------|-------|------------|-------|
| Max. current / max. power (continuous) | 24A | 24A | 18A | 12A | 12A | 0.5A | 2.5A |
| | Total 140W | | Total 420W | | | Total 550W | |
| Peak current / peak power (5 sec max.) | 24A | 24A | 22A | 16A | 16A | 0.5A | 3.0A |
| | Total 150W | | Total 480W | | | Total 650W | |
| Min. current | 0A | 0A | 0A | 0A | 0A | 0A | 0A |

Dimensions

| | |
|------------|--------------------------|
| W×H×D (mm) | 150×86×180 (PS/2 ++size) |
|------------|--------------------------|

Output connector (optional component)



*Refer to p.115 "Detachable output harness" for details

Ready to use with full option!
'Mina-Motto san' series

Mina-Motto san series

*ePCSA-650P-E2S-MN" contains;

- Power supply
- Output harness set (6 types)
 - WH-M2024-500: 1 pcs
 - WH-M2424-500: 1 pcs
 - WH-V0808-500: 1 pcs
 - WH-VG208-500: 1 pcs
 - WH-PP610-850: 1 pcs
 - WH-PS610-850: 2 pcs
- *Refer to p.115
- AC power cable: WH2753
- 2P conversion plug
- AC power cable coming off prevention clamp: ACC2734
- Mounting screws
- Operation manual
- Warranty



ePCSA-650P-E2S-MN (Standard stock)

General Specification Condition: at normal temperature and humidity unless otherwise specified

BRAIN
Power
Supply

Desktop PC Power Supply

Non-backup power supply

| Items | | Specification | | | | | | | Measurement conditions, etc. | |
|-----------------|---|--|---|------------|-------------|----------|--------------------|--|---|---|
| AC Input | Rated Voltage | 100 - 240 VAC (85* - 264 VAC) | | | | | | | Worldwide range *Refer to Fig.1 | |
| | Input Frequency | 50 / 60Hz | | | | | | | 47-63Hz | |
| | Efficiency | 73% min. (100 VAC), 77% min. (240 VAC) *Characteristic data: Fig.4 | | | | | | | At rated input/output | |
| | Power Factor | 99% min. (100 VAC), 96% min. (240 VAC) *Characteristic data: Fig.5 | | | | | | | | |
| | Inrush Current | 31A peak (100 VAC), 76A peak (240 VAC) *Characteristic data: Fig.6 | | | | | | | At rated input/output at cold start (25°C) | |
| | Input VA | 8.3A max. (100 VAC), 3.3VA max. (240 VAC) *Characteristic data: Fig.5 9.5A max. (100 VAC), 3.8A max. (240 VAC) | | | | | | | At rated input and max. output (25°C) At rated input and peak output (25°C) | |
| Output | Rated Voltage | +3.3V | +5V | +12V1 | +12V2 | +12V3 | -12V | +5VSB | | |
| | Rated Current | 11A | 15A | 15A | 10A | 10A | 0.5A | 2.5A | | |
| | Max. Current / Power | 24A | 24A | 18A | 12A | 12A | 0.5A | 2.5A | Max. output power: 550W | |
| | | 140W max. | | 420W max. | | | 550W max. | | | |
| | Peak Current / Power | 24A | 24A | 22A | 16A | 16A | 0.5A | 3.0A | Peak output power: 650W Time: 5 sec or less. Duty ratio of repetitive load: 10% or less *Refer to Fig.2 | |
| | | 150W max. | | 480W max. | | | 650W max. | | | |
| | Min. Current | 0A | 0A | 0A | 0A | 0A | 0A | 0A | | |
| | Total Voltage Accuracy (%) | ±4 max. | ±4 max. | ±5 max. | ±5 max. | ±5 max. | ±5 max. | ±5 max. | Total accuracy of temperature, input, and load fluctuations | |
| | Max. Ripple Voltage (mVp-p) | 50 max. | 50 max. | 80 max. | 80 max. | 80 max. | 80 max. | 50 max. | Two wires are coming out from the output connector and connected into one at the edge of 50cm max. long. 47µF electrolytic capacitor and 0.1µF ceramic capacitor are placed on it and it is measured by the 100MHz oscilloscope. *Characteristic data: Fig.17 | |
| | Max. Spike Voltage (mVp-p) | 100 max. | 100 max. | 200 max. | 200 max. | 200 max. | 200 max. | 100 max. | | |
| Protection | Overcurrent Protection | OCP Point (A) | 25 min. | 25 min. | 25 min. | 18 min. | 18 min. | Short protection | | |
| | | Method | All outputs except for +5VSB shutdown PWR_OK goes to 'L' | | | | | Hold-down, or all output shutdown | All outputs shutdown | All other outputs are rated loads at rated input voltage. Reclosing period shall be 60 sec., or longer |
| | Recovery | Reclosing AC input, or switching PS_ON# signal from 'H' to 'L' | | | | | Automatic recovery | | | |
| | Overvoltage Protection | OVP Point (V) | 3.76 - 4.3 | 5.74 - 7.0 | 13.4 - 15.6 | | | - | - | Reclosing period shall be 60 sec., or longer |
| Method | | All outputs except for +5VSB shutdown PWR_OK goes to 'L' | | | | | - | - | | |
| | Recovery | Reclosing AC input, or switching PS_ON# signal from 'H' to 'L' | | | | | - | Zener Clamp | | |
| Environment | Operating Temp. / Humidity | 0 to 60°C*/10 to 90% | | | | | | | *Refer to Fig.3 No condensation. | |
| | Storage Temp. / Humidity | -25 to 70°C/10 to 95% | | | | | | | No condensation. | |
| | Vibration | Displacement amplitude: 0.075mm (10-55Hz), Sweep cycles: 10, Test duration: 45 minutes each axis | | | | | | | JIS-C-60068-2-6, at no operation | |
| | Mechanical Shock | Lift one bottom edge up to 50mm and let it fall. Number of bumps: 3 each of 4 edges | | | | | | | JIS-C-60068-2-31, at no operation | |
| Insulation | Dielectric Strength | AC input - DC output/FG: 1500 VAC for 1 minute | | | | | | | Cut-off current: 15mA, Humidity: 60% max. | |
| | Insulation Resistance | AC input - DC output/FG: 50MΩ min. | | | | | | | With 500 VDC at 60% Humidity max. | |
| | Leakage Current | 0.5mA max. (100 VAC) / 1mA max. (200 VAC) *Characteristic data: Fig.7 | | | | | | | YEW. TYPE3226 (1kΩ) or equivalent | |
| EMC | Line Noise Immunity | ±2000V (pulse width: 100/1000ns, repetitive cycle: 30-100Hz, normal/common mode with pos./neg. polarity for 10 minutes) | | | | | | | Measured by INS-410 No fluctuation of DC output or malfunction | |
| | Electrostatic Discharge | EN61000-4-2 compliant | | | | | | | | |
| | Radiated, Radio-Frequency EM Field | EN61000-4-3 compliant | | | | | | | | |
| | Fast Transient Burst | EN61000-4-4 compliant | | | | | | | | |
| | Lightning Surge | EN61000-4-5 compliant | | | | | | | | |
| | RF Conducted Immunity | EN61000-4-6 compliant | | | | | | | | |
| | Magnetic Field Immunity | EN61000-4-8 compliant | | | | | | | | |
| | Voltage Dip / Regulation | EN61000-4-11 compliant | | | | | | | | |
| | Conducted Emission | VCCI-A, FCC-A, EN55022-A compliant *Characteristic data: Fig.8 and 9 | | | | | | | Measured by single unit | |
| | Harmonic Current Regulation | IEC61000-3-2 (Ver.2.1) Class D, EN61000-3-2 (A14) Class D compliant | | | | | | | With rated input/output | |
| Safety Standard | UL60950, CSA C22.2 No.950 (c-UL), EN60950, CE Marking (LVD,EMC) | | | | | | | The Electrical Appliance and Material Safety Law Item 2 only to be applied | | |
| Others | Cooling System | Forced air cooling: fan control can be switched between thermal-sensing variable speed and stabilized full rotation modes. | | | | | | | Fan rotates at low speed depending on the internal temperature of power supply even PS_ON# signal 'H'. | |
| | Output Grounding | Connected to chassis (FG)* | | | | | | | *It can be customized to connect to capacitor | |
| | Output Hold-up Time | PWR_OK holds up 16ms min. after AC failure *Characteristic data: Fig.14 | | | | | | | At rated output | |
| | Reliability Grade | FA (industrial equipment grade, double-sided PCBs with through holes) | | | | | | | Follow our standard | |
| | MTBF | 70,000 H min. | | | | | | | | |
| | Weight | 2.0 kg typ. | | | | | | | | |
| | Warranty | 3 years after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost. | | | | | | | Except for errors caused by operation not listed | |

Fig.1 Derating for Low Input Voltage

When the input voltage is 90 VAC or less, follow the derating curve to derate rated current/power, max. current/power, and peak current/power.

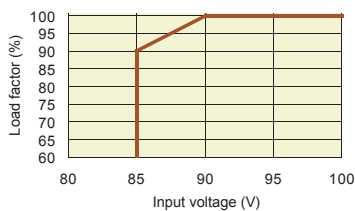


Fig.2 Duty Ratio

Peak current/power shall be 5 sec or less continuously. For repetitive loads, duty ratio shall be 10% or less.





Fig.3 Temperature Derating

When the ambient temperature (near the airflow inlet) exceeds 40°C, follow the derating curve to derate rated current/power, max. current/power, and peak current/power.

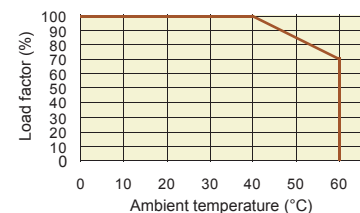

Signal Input / Output Specification Condition: at normal temperature and humidity unless otherwise specified


| Items | Specification | Note |
|---------------|---|--|
| Input Signal | Output ON / OFF Control Signal (PS_ON#) +3.3V SENSE | +3.3V, +5V, +12V1, +12V2, +12V3, and -12V outputs shutdown with 'H' or 'OPEN' input Note: With 'OPEN' input, the voltage of PS_ON# signal becomes 2.0V or less. The input terminal to detect the voltage of +3.3V output; by connecting to the load terminal, only the line drop of the + side of the output cable is compensated. |
| Output Signal | Normal Output Signal (PWR_OK) Fan Monitor Signal (FAN M) | 'H' signal is delivered at normal output (detection delay time: 100 - 500ms). Two cycle pulses per one rotation of the fan motor are delivered (open collector output). Duty ratio of the pulse shall be 0.5 typ. (Interval between the signals becomes longer at low speed and shorter at high speed.) The signal remains 'L' or 'OPEN' when the fan stops caused by any failure or malfunction. |

| Signal Circuit | | |
|----------------------|-----------------------|----------------|
| Input Signal Circuit | Output Signal Circuit | |
| <p>(PS_ON#)</p> | <p>(PWR_OK)</p> | <p>(FAN M)</p> |


- Internal temperature detection element**
Achieving the sound reduced and long life of fan by detecting the most thermosensitive point and controlling the fan speed
- Electrolytic capacitors**
Japanese-made 105°C 2000 hours min. for all capacitors
- Simple layout design**
Superior cooling and low inter-component interference layout design. Adopting the connection system for inter-unit connections
- Detachable output harness system**
Fully applicable to the standard older than ATX12V Ver.1.3, - Ver.2.01 and also to EPS12V
- Safety standard**
UL, CSA (c-U), and EN certified. CE marking and PSE with ministerial ordinance 2 only are obtained.
- RoHS fully compliant**
Amount of hazardous materials in PWBs, wires, electronic components, coils, chassis, and labels specified by International standard is lower than acceptable level.
- Electronic components**
by major Japanese manufacturers
- Feedback noise measures**
FCC-A, VCCI-A, EMI80/22-A, CIS-PR22-A. Leakage current required in Japan, 0.5mA max. at 100 VAC, has been achieved.
- Removable Fan due to functional plastic panel**
Various functions, such as, Fan replacement in front, switch barrier to prevent wrong operation.
- Cooling Fan**
Fan alarm is equipped with fan monitor signal output. Sound reduction; high speed rotation at high internal temperature.

BRAIN Power Supply
Desktop PC Power Supply
Non-backup Power Supply

Sequence Diagram

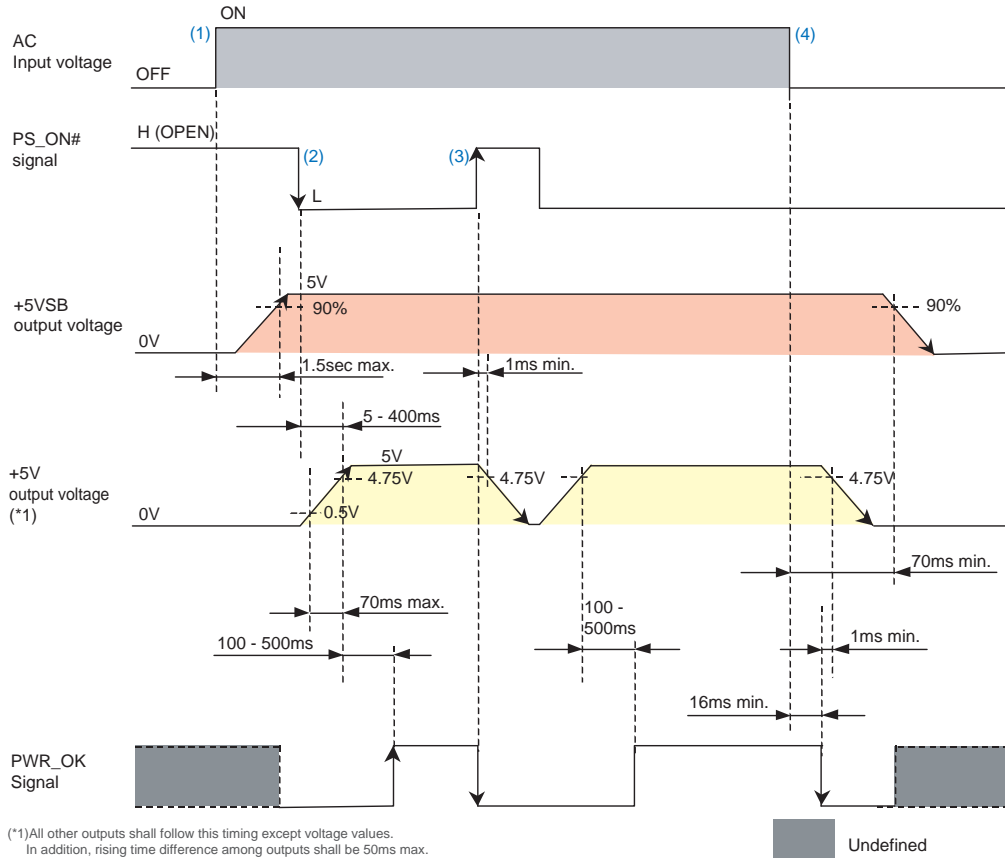

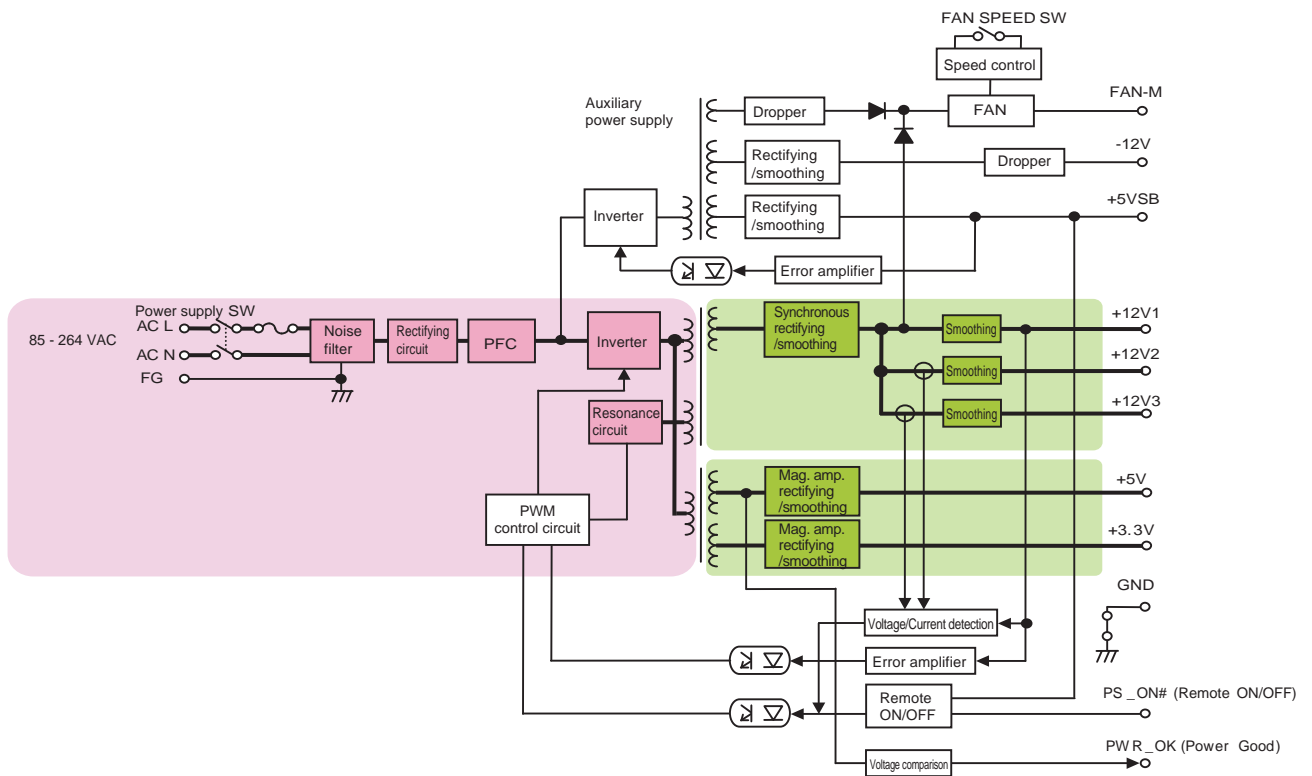


Block Diagram



BRAIN Power Supply
 Desktop PC Power Supply
 Non-backup Power Supply



Optional Components Sold Separately

| Cable | | | |
|---|-----------|---------------|--|
| Picture | Model | Type | Description |
|  | WH2753 | AC power cord | 125 VAC 12A [PSE] |
|  | WH2753-02 | AC power cord | 125 VAC 12A (tracking resistance type) [PSE] |

| Parts / Unit | | | |
|---|---------|-------------------------------|--|
| Picture | Model | Type | Description |
|  | ACC2734 | AC power cord retention clamp | It prevents the slipping of AC power cord (WH2753, WH2753-02) and operational mistakes of power switch. *In some cases, the clamp (ACC2734) might not be possible mounted to a commercial AC power cord. |


| Other Optional Components | | | |
|---------------------------|--|-----------|--|
| Model | Description | Model | Description |
| ACC2637 | Automatic startup unit | WH5105 | 12V 4-pin connector conversion harness (80mm) |
| WH2820 | 20-pin extension harness (600mm) | WH5105-02 | 12V 4-pin connector conversion harness (320mm) |
| WH2747 | 20-pin extension harness (450mm) | WH5055 | AT connector conversion harness |
| WH2892-02 | 20-pin extension harness (200mm) | ACC5046 | Harness with PS_ON switch |
| WH2812 | PCI-E 6-pin connector conversion harness | ACC5077 | PS_ON terminal short connector |
| | | WH5073 | PS_ON terminal short 20-pin harness |

Internal Structure

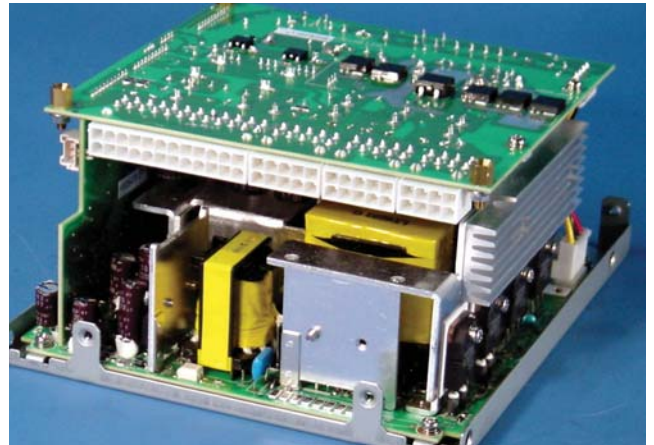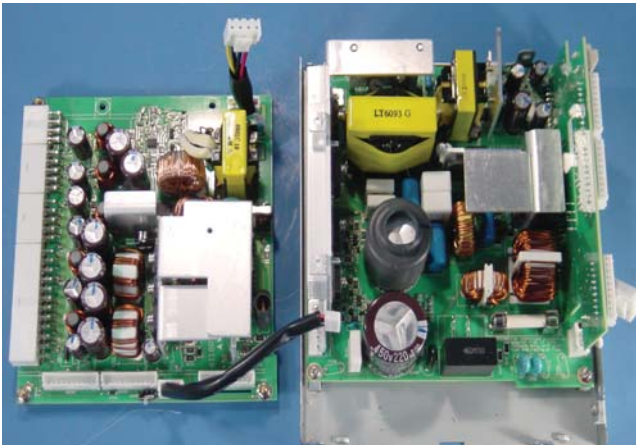


Characteristics Data (Examples of actual measurement)


● Fig.4 Efficiency / Input Current vs. Output Power

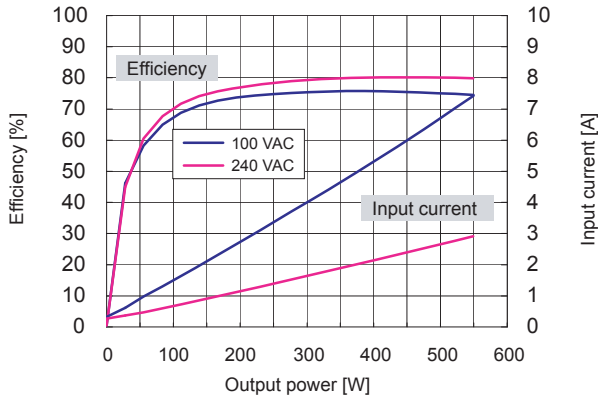

● Fig.5 Power Factor / Input VA vs. Output Power

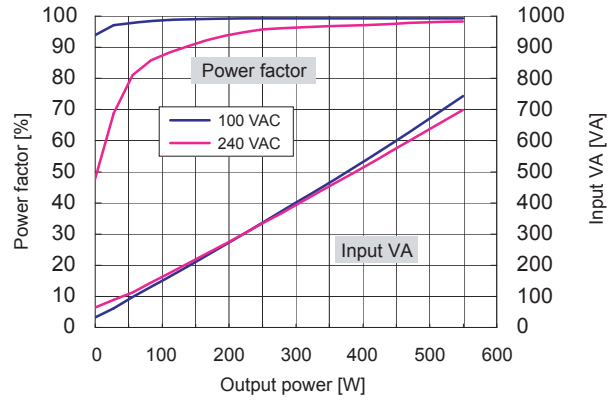

● Fig.6 Inrush Current

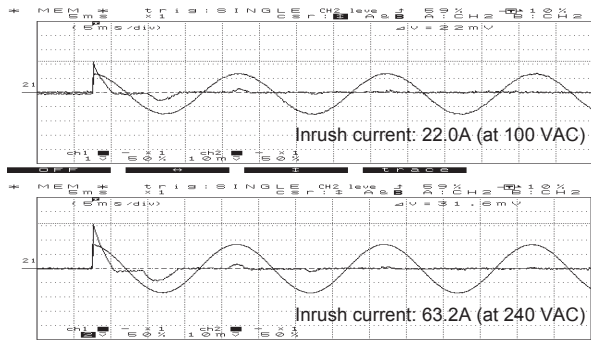


● Fig.7 Leakage Current

Input: 100 / 240 VAC
Load: Rated and min. load

| | Rated load | Min. load |
|---------|------------|-----------|
| 100 VAC | 0.41mA | 0.33mA |
| 240 VAC | 0.69mA | 0.68mA |


● Fig.8 Conducted Emission at 100 VAC

Input: 100 VAC
Load: Rated
Mode: Peak

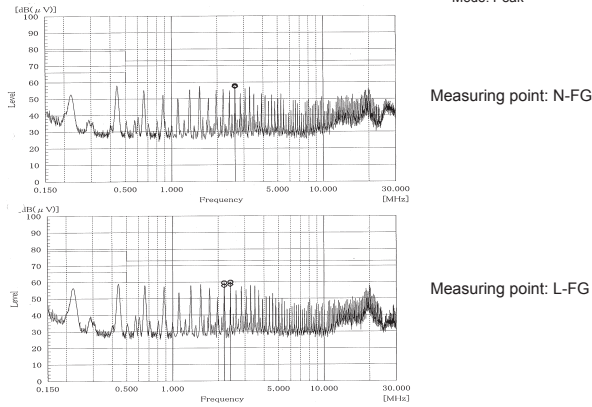


● Fig.9 Conducted Emission at 230 VAC

Input: 230 VAC
Load: Rated
Mode: Peak

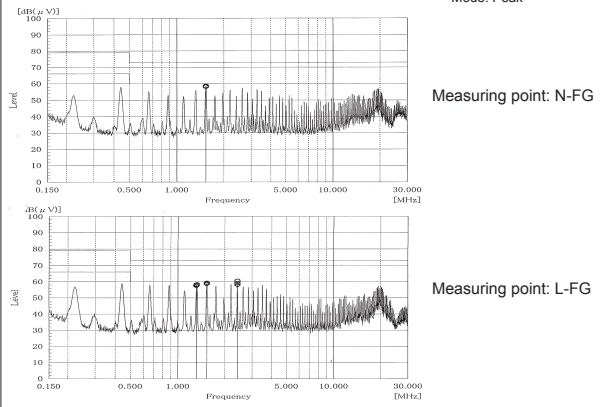


● Fig.10 Rising Characteristics at 100 VAC

Input: 100 VAC
Load: Rated
Time axis: 2ms/DIV

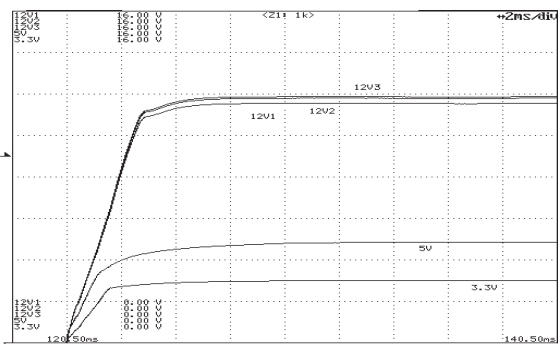


● Fig.11 Falling Characteristics at 100 VAC when REMOTE goes Off

Input: 100 VAC
Load: Rated
Time axis: 10ns/DIV

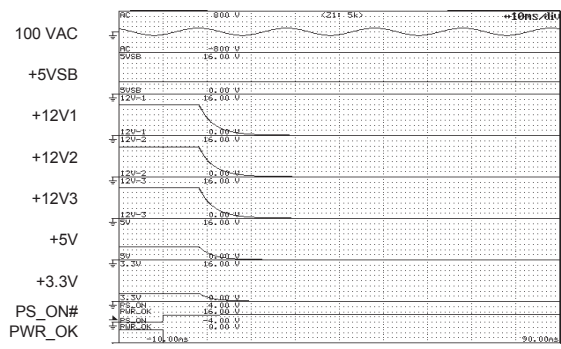


Characteristics Data (Examples of actual measurement)


● Fig.12 Rising Characteristics at 240 VAC

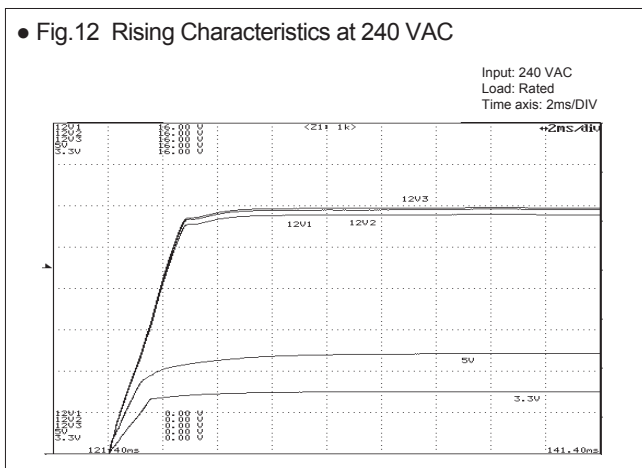


● Fig.13 Falling Characteristics at 240 VAC when REMOTE goes Off

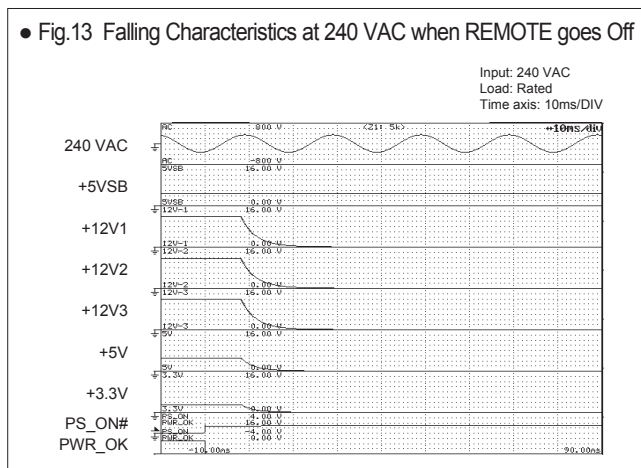

● Fig.14 Output Hold-up Time vs. Output Power

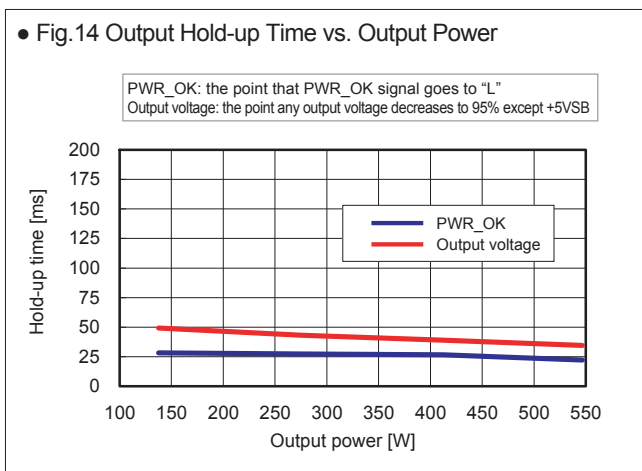

● Fig.15 Dynamic Load Fluctuation Characteristics at 1kHz

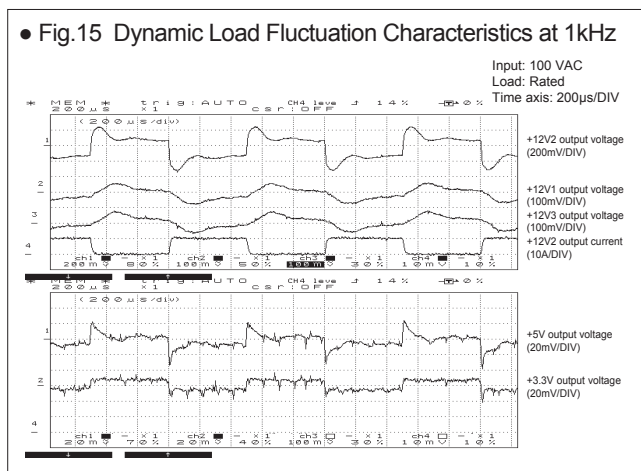


● Fig.16 Output Voltage Regulation

| | Output | | | | | |
|--------------|-----------|------------|-----------|-----------|------------|-----------|
| | Min. load | Rated load | Peak load | Min. load | Rated load | Peak load |
| +12V1 output | 0A | 15A | 22A | | | |
| +12V2 output | 0A | 10A | 16A | | | |
| +12V3 output | 0A | 10A | 16A | | | |
| +5V output | 0A | 15A | 24A | | | |
| +3.3V output | 0A | 11A | 24A | | | |

| | 85 VAC | 100 VAC | 132 VAC | 176 VAC | 240 VAC | 264 VAC |
|---------------------------|----------|----------|----------|----------|----------|----------|
| +12V1 output (min. load) | 12.186 V | 12.185 V | 12.185 V | 12.185 V | 12.185 V | 12.185 V |
| +12V1 output (rated load) | 11.929 V | 11.926 V | 11.926 V | 11.927 V | 11.928 V | 11.926 V |
| +12V1 output (peak load) | 11.795 V | 11.794 V | 11.793 V | 11.793 V | 11.794 V | 11.793 V |
| +12V2 output (min. load) | 12.180 V | 12.178 V | 12.178 V | 12.178 V | 12.178 V | 12.177 V |
| +12V2 output (rated load) | 11.983 V | 11.982 V | 11.982 V | 11.982 V | 11.982 V | 11.981 V |
| +12V2 output (peak load) | 11.866 V | 11.866 V | 11.865 V | 11.865 V | 11.865 V | 11.865 V |
| +12V3 output (min. load) | 12.180 V | 12.178 V | 12.178 V | 12.177 V | 12.178 V | 12.177 V |
| +12V3 output (rated load) | 12.069 V | 12.067 V | 12.066 V | 12.066 V | 12.067 V | 12.066 V |
| +12V3 output (peak load) | 12.009 V | 12.008 V | 12.007 V | 12.007 V | 12.008 V | 12.008 V |
| +5V output (min. load) | 5.119 V | 5.122 V | 5.120 V | 5.118 V | 5.116 V | 5.121 V |
| +5V output (rated load) | 4.993 V | 5.002 V | 4.996 V | 4.992 V | 4.987 V | 4.996 V |
| +5V output (peak load) | 4.957 V | 4.962 V | 4.957 V | 4.955 V | 4.951 V | 4.957 V |
| +3.3V output (min. load) | 3.379 V | 3.379 V | 3.379 V | 3.379 V | 3.379 V | 3.379 V |
| +3.3V output (rated load) | 3.282 V | 3.282 V | 3.282 V | 3.282 V | 3.282 V | 3.282 V |
| +3.3V output (peak load) | 3.222 V | 3.221 V | 3.221 V | 3.222 V | 3.221 V | 3.221 V |

● Fig.17 Ripple and Spike Voltage

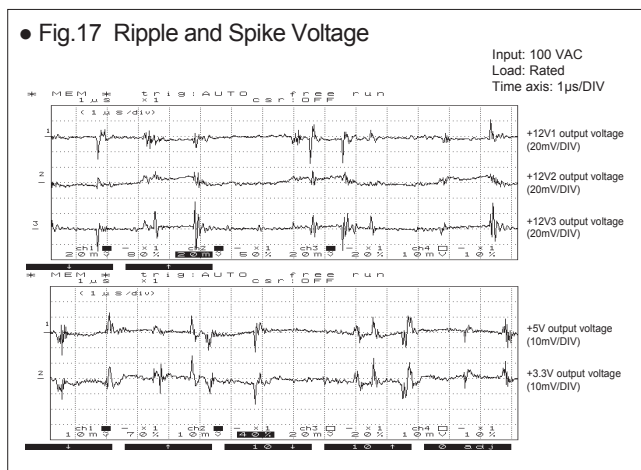

● Fig.18 Ambient Temperature vs. Expected Service Life

■ Electrolytic capacitors

Input: 90 VAC
Load: Rated
Operating time: 24 consecutive hours

| Intake air temp. | 20°C | 30°C | 40°C |
|----------------------------|------------|-------------|-------------|
| Expected service life (yr) | approx. 15 | approx. 7.6 | approx. 3.8 |

※ Lifetime shall be 15 years at longest due to deterioration of sealing plates.

■ Fan

| Ambient temp. | 20°C | 30°C | 40°C | 50°C |
|----------------------------|------------|-------------|-------------|-------------|
| Expected service life (yr) | approx. 13 | approx. 8.7 | approx. 5.8 | approx. 3.9 |

● Fig.19 Over Current Protection (V-I Characteristic)

