


Battery Package Connection Harness WH-02XL04XL-350-01

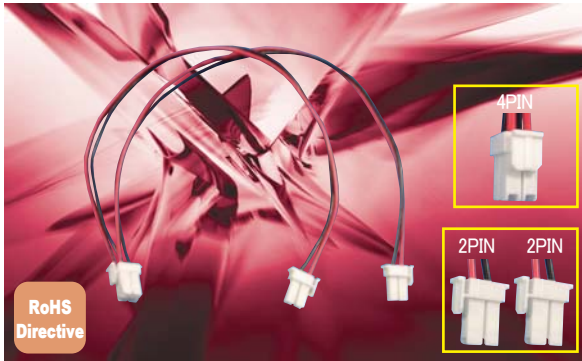

Model	Stock
WH-02XL04XL-350-01	Standard stock


- Power harness for 24V output type OZP series (battery backup is possible) and GPSA-360-24-TP to connect with a battery package and conduct charge/discharge
- Power harness for connecting two battery packages
(For GPSA-750-24-TP, use two wires of WH-04XL04XL-350)

Compatible Power Supply

Model	Page	Model	Page
OZP-120 series	C-E86	GPSA-360-24-TP	C-E122
OZP-170 series	C-E104		

※It can be connected to OZP series 24V output (with battery backup) type.

Outline Drawing

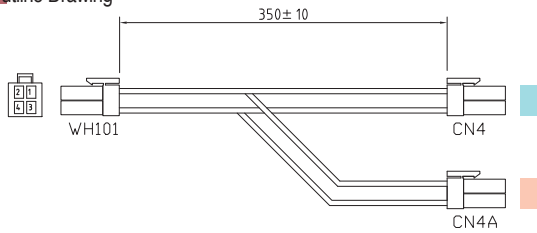

Compatible Battery Package

Model	Page
BS14A-H24/2.5L	C-H2

Pin Assignment

CONNECTOR TYPE	PIN No.	PIN No.	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
WH101	1	1	BATT+	RED	CN4	Housing: XLP-02V(JST) or equivalent Terminal: SXF-41T-P0.7(JST) or equivalent
		2	BATT-	BLACK		
	2	1	BATT+	RED	CN4A	Housing: XLP-02V(JST) or equivalent Terminal: SXF-41T-P0.7(JST) or equivalent
		2	BATT-	BLACK		

Product Specification

Items	Specification	Measurement conditions
Operating temp.	-10 to 70°C	Thermal gradient: 15°C/H
Storage temp.	-25 to 70°C	Thermal gradient: 15°C/H
Relative humidity	10 to 95%	No condensation
Warranty	One year after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost.	It shall be used under normal temperature, humidity, and rating.