


Product Specification

Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Nanba Technical Center

Scope:

This specification applies to the Embedded-type DC stabilized Power Supply, model PCFL-180P-X2S2.
All items in this specification are provided at normal temperature (20 ± °C) and Humidity unless otherwise specified.

General Specification

	Items	Specification and Standard	Measurement Conditions, etc.	Test	
Input Specification	Rated Voltage and Current	AC 100V/240V 2.1A/0.82A (Displayed on the Label)	Current is at 150W output with forced air cooling.	-	
	Voltage Range	AC 85V (Note 1) to 264V			
	Rated Frequency	50/60 Hz	Range: 47 Hz to 63 Hz		
	Inrush Current	Refer to Note 2 below			
	Input VA at Standby	30VA typical at 100V AC / 60VA typical at 240V AC 10VA typical at 100V AC / 40VA typical at 240V AC	PS ON 'H' or 'OPEN', and 5VSB with rated load PS ON 'H' or 'OPEN', and 5VSB with No load		Type
	Efficiency	75% or higher (77% typical)			
	Power Factor	90% or higher	at Rated Input/Output		
Environment	Operating Temp./Humidity	0 to 60°C (Note 1) / 10 to 90% RH No condensation		Type	
	Storage Temp./Humidity	-20 to 70°C / 10 to 95% RH No condensation			
	Vibration	To endure the vibration acceleration of 2G with vibration frequency of 10 to 55 Hz for 10 sweep cycles in each X-Y-Z direction.	JIS C 60068-2-6 Compliant at No operation		
	Mechanical Shock (Surface Dropping)	Lifting one bottom edge up to 50 mm high with the opposite edge placed on the test bench, and let it fall. Repeat 3 times for each of four bottom edges, and no malfunction shall be observed.	JIS C 60068-2-31 Compliant at No operation		
Others	Insulation Resistance	50M Ω min. between Input and Chassis/Outputs, and between Outputs and Chassis	With DC 500V Megger at normal temp./Humidity	100%	
	Dielectric Strength	AC 1.5KV for one minute between Input and Chassis/Outputs	For ONE second at production line Cut-off current: 20mA max. at normal temp./Humidity	Type	
	Leakage Current	0.5mA max. at 100V AC / 1mA max. at 200V AC	at Normal temperature and Humidity		
	Line Noise Test	±2000V (pulse width of 100/1000nS, cycle period of 30 to 100Hz, Normal/Common mode with Positive/Negative polarity for one minute for each)	To be measured by INS-410. No voltage fluctuation in DC-factor nor malfunction.		
	Surge Immunity Test	IEC61000-4-5 Installation Class 3 compliant (5 times for each of Positive/Negative polarity)	No malfunction nor breakdown at AC 240V input		
	Electrostatic Discharge Immunity Test	IEC61000-4-2 Test Level 3 compliant (10 times of Chassis contact discharge)	No malfunction nor breakdown at AC 100/240V input		
	Conducted Emission	VCCI/FCC part15/CISPR 22/EN55022 Class A compliant	To be measured on Power Supply single body		
	Safety Standard	UL60950-1, CSA60950-1(c-UL), and IEC62368-1(CE marking) 	Class I equipments, Embedded type power supply at AC 100/240V input		
	Harmonic Current	IEC61000-3-2 (Ver. 2.1) Class D compliant			
	Cooling System	Natural air cooling or Forced air cooling by external fan(s) (Note 3)			
	Dimension	93 (W) by 55 (H) by 160 (D)	Except protrusions - Refer to Outline and Dimension drawing		Sampling
	Weight	0.85Kg typical			Type
	Life Expectancy	Five Years or longer at Rated load with natural air cooling. Seven years or longer at 150W load with forced air cooling (Note 4)	Life expectancy in hours at AC100V in continuous operation at ambient temp. of 25°C and normal humidity.		-
	M.T.B.F.	100,000 or longer	Calculated based on EIAJ RCR-9102		
	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Except causes generated by operations out of this specification.		
Restriction on Hazardous substances	RoHS Directive compliant				


Note 1: Follow the derating conditions shown in another page when the unit is operated at low input voltage and under high temperature environment.

Note 2: In general, inrush current is defined as the peak charging current into electrolytic capacitors used for input smoothing. This type of the inrush current does not exist in this unit as no electrolytic capacitors are used for input smoothing. Also, the charging current into X-capacitors used for input filter circuit is not defined as inrush current for its width is 100µs or shorter.

Note 3: Follow the installation conditions shown in another sheet when an external fan is used for forced air cooling.

Note 4: For life expectancy at natural air cooling, calculate it according to installation condition Item 2-drawing ① shown in another sheet, and for life expectancy at forced air cooling, calculate to follow the installation condition Item 2-drawing ① and Fan installation condition shown in Item 3-drawing ④



	20.09.29	EN60950-1(NEMKO)⇒IEC62368-1(CE marking) (I-321004)	takeda				
REV.	Date	Content	By	REV.	Date	Content	By
Drawn by	Checked by	Approved by	Document No.				Sheet No.
Shirai	Hanano	Takeda	5113-08-4-520A				1/8

Product Specification

Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Nariba Technical Center


Output Specification (Voltage measurement point is at the output connector terminals and voltage drop caused by contact resistance of receptacle side connectors is not included).

Items	CH1	CH2	CH3	CH4	CH5	Measurement Conditions, etc.	Test	
Rated Voltage [V]	+3.3	+5	+12	-12	+5VSB	Continuous Rating (Criteria when Input/Output characteristics are measured). Total rated output power: 89.8W		
Rated Current [A]	4	4	4	0.3	1			
Rated Power [W]	13.2	20	48	3.6	5	Continuous Rating at natural air cooling		
Max. Current 1 [A]	10	10	7.5	0.3	1.5			
Max. Power 1 [W]	Total 60W max.		90	3.6	7.5	Continuous Rating at natural air cooling (with optional special AL-heat sink attached)		
Max. Current 2 [A]	10	10	8.5	0.3	1.5			
Max. Power 2 [W]	Total 70W max.		102	3.6	7.5	Continuous Rating at forced air cooling (with an external Fan)		
Max. Current 3 [A]	10	10	10	0.3	1.5			
Max. Power 3 [W]	33	50	120	3.6	7.5	Instantaneous Rating (within 5 seconds)		
Max. Peak Current [A]	10	10	15	0.3	2			
Max. Peak Power [W]	33	50	180	3.6	10	Minimum load to achieve output characteristics and timing characteristics		
Min. Current [A]	0	0	0	0	0			
Regulation Accuracy [%]	±5 Max.	±5 Max.	±5 Max.	±10 Max.	±5 Max.	Accuracy against rated output voltage value when Input voltage changes from Min. to Max., and each load changes statically within Output Power restriction diagram 1, 2 and 3.	100%	
Regulation Accuracy 2 (at Instantaneous Rating) [%]	±5 Max.	±5 Max.	±5 Max.	±10 Max.	±5 Max.	Accuracy against rated output voltage value when Input voltage changes from Min. to Max., and each load changes statically within Output Power restriction diagram 4.	Type	
Ripple Voltage [mVp-p]	50 Max.	50 Max.	120 Max.	120 Max.	50 Max.	Connect wires of 150mm max. in length between output terminals and the measurement board with capacitors (47μF) placed on it and conduct the measurement at the board. The board shall be away from load lines.	100%	
Noise [mVp-p]	100 Max.	100 Max.	170 Max.	170 Max.	100 Max.	Time to reach 90% from 10% of rated output voltage: The load shall be a resistor.	Type	
Rising Time [mS]	1 Min./20 Max.							
OCP and Short	Method	Hold-down: Outputs of CH1 to CH4 are to be latch locked.			Fold-back	Hold-down	All outputs shut down when CH5 is shorted. (Refer to Note 1).	100%
	PCP Point [A]	10.5 min.	10.5 min.	—	0.32 min.	2.1 min.	All outputs are rated except the measured output.	
Recovery	※ Manual			Automatic		※ PS_ON [#] signal shall be delivered or Input voltage shall be turned on after 10 seconds Min.		
OVP	Method	All outputs latch locked					External over voltage shall not be applied to CH1, 2, and 3 due to circuit characteristics. CH4 is not equipped with OVP.	Type
	OVP Point [V]	3.7 ~4.3	5.7 ~7.0	13.8 ~15.6	—	5.7 ~7.0		
	Recovery	Manual; Input voltage shall be turned on after 10 seconds or more.						
Insulation between GNDs of each Output	All GNDs of each output are connected.					All GNDs are isolated from Power Supply Chassis.	Type	
Back-up function operated for output at blackout	Possible by connecting with the battery, BS17A-H24/2.0L, to CN13					See more details at battery specification	Type	

Note 1: Other outputs shut down when CH5 is completely shorted, that is, Output voltage is less than one volt. All outputs automatically recover when the short of CH5 is removed. However, if the short of CH5 is incomplete, that is, output voltage is one to 3 volts remained due to Hold-back, all other outputs go to latch lock. All outputs except CH5 remain latch locked event the short of CH5 is removed. In this case, PS_ON[#] signal shall be delivered or Input shall be rebooted after 10 seconds for manual recovery.

Note 2: OCP point of CH3 is provided at 25°C of AI-Chassis. (※ OCP point of CH3 varies according to rise of ambient temperature and component temperature due to Over current vs. Thermal protection circuit characteristics built in CH3.

Chart 1. Instantaneous power frequency condition

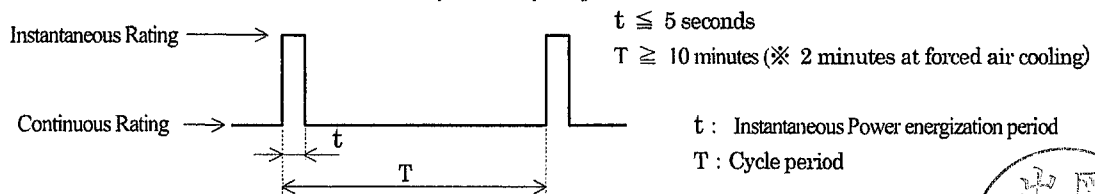

Nov.16.2007	Add indication of back-up function at black out "I-191131"	takeda					
REV.	Date	Content	By	REV.	Date	Content	By
Drawn by	Checked by	Approved by	Document No.				Sheet No.
Shirai	Hanano	Takeda	5113-08-4-520A				2/8



Product Specification

Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Nanba Technical Center

Signal Input/Output Specification


	Items	Specification	Test
Input	PS_ON#	Upon receipt of 'L', CH1 to CH4 are delivered. Upon receipt of 'H' or 'OPEN', CH1 to CH4 shut down, and Latch lock is reset when outputs shut down due to OCP and OVP activation. (Refer to Note 1 below). In addition, re-delivery period when 'H' or 'OPEN' of PS_ON# (Output OFF) goes to 'L' (Output ON) shall be 5 seconds or longer.	100%
	+3.3V SENSING	Input terminal for detecting CH1 (+3.3V) output voltage. By connecting to + side of Load end, the voltage drop on + side output cable is compensated. (Compensated voltage is 0.1V max.) (Refer to Note 2 below).	
Output	PWR_OK	'H' is delivered when CH2 (+5V) output is ON.	

Note 1: Voltage range for 'L' of PS_ON# signal is 0.8V max. (0V to 0.8V), 2.4V min. (2.4V to 18V) for H. Threshold level as power supply is 19V typical., and the level is used to judge Low or High having some undefined area.

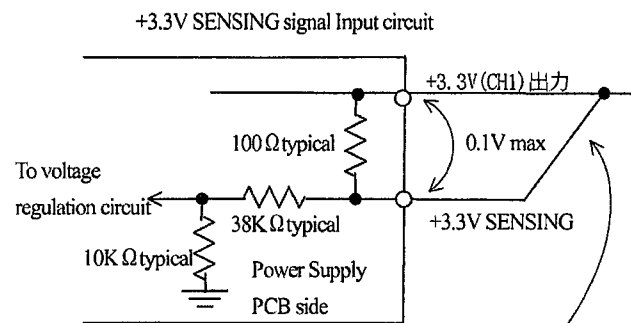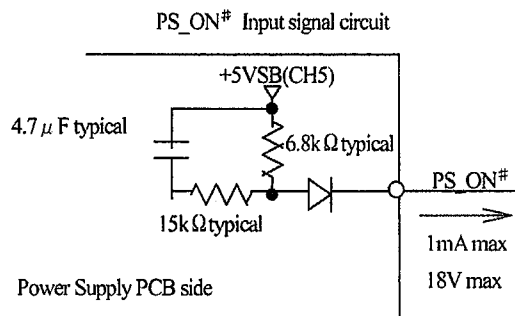

Note 2

Connect +3.3V SENSING to + side of +3.3V (CH1) load.
The voltage drop of the cable between connector on power supply and + side load end shall be 0.1V max.
Do not apply over voltage as the resistor (100 Ω) inside the power supply may get damaged.

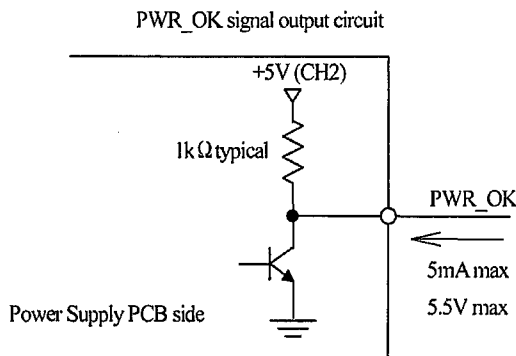


REV.	Date	Content	By	REV.	Date	Content	By	
Drawn by	Checked by	Approved by	Document No.					Sheet No.
Shirai	Hanano	Takeda	5113-08-4-520					3/8

Product Specification

Model PCFL-180P-X2S2	Date June 28, 2007
	Department Nanba Technical Center

Sequence Timing Chart (To be provided at Rated Input/Output condition, Test: Type test)

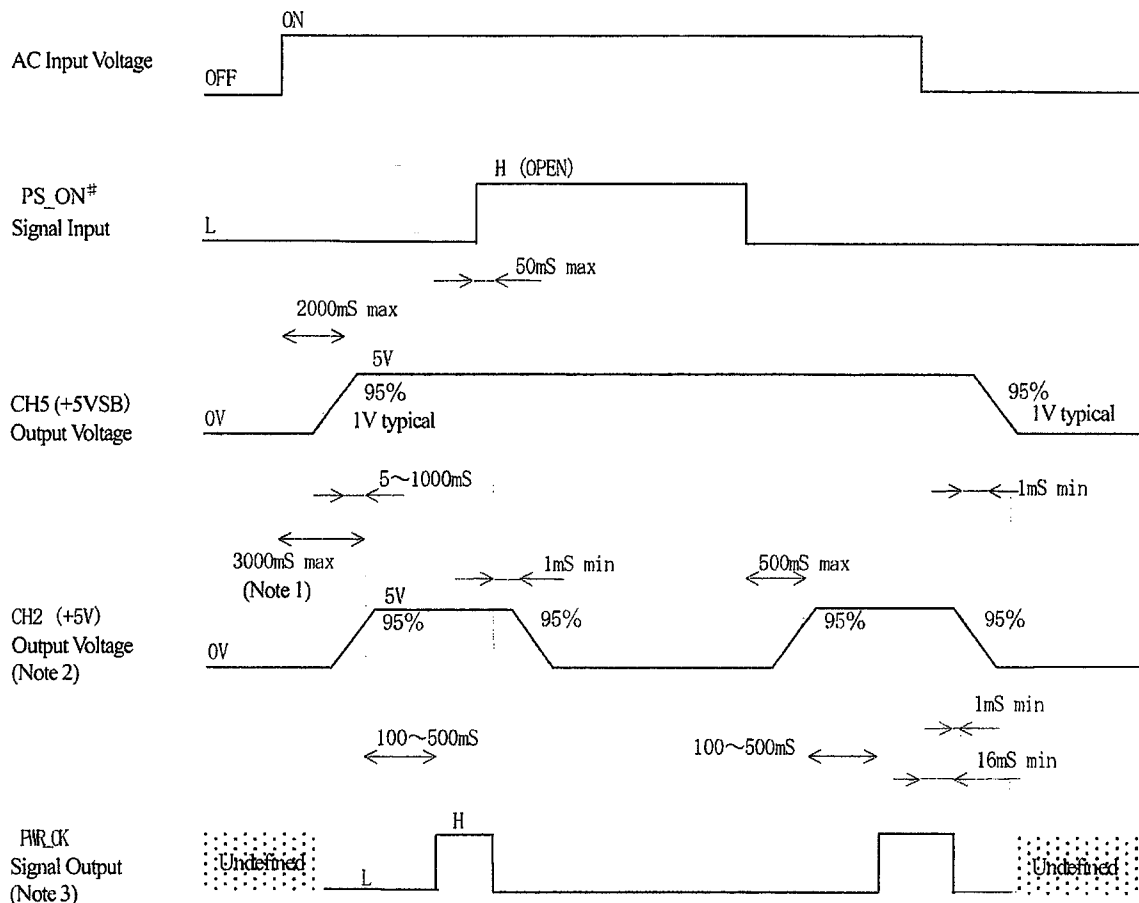

Note 1: Provided that Reclosing period after Input is turned off is 10 seconds or longer.

Note 2: CH1 (+3.3V) starts up 5 ms (typical) after CH2 (+5V) and CH3 (+12V) start up at the same time. In addition, Output voltage levels of CH2 (+5V) and CH3 (+12V) are higher than or equal to the level of CH1 (+3.3) during startup. Also, the order and output voltage level difference for each output at falling is not defined.

Note 3: The rise time and fall time of PWR_OK signal shall be 1mS or less. (Provided that the load of PWR_OK signal is NOT capacitive).



--	--	--	--	--	--	--	--	--	--

REV.	Date	Content	By	REV.	Date	Content	By

Drawn by Shirai	Checked by Hanano	Approved by Takeda	Document No. 5113-08-4-520	Sheet No. 4/8
---------------------------	-----------------------------	------------------------------	--------------------------------------	-------------------------

Product Specification

Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Nanba Technical Center


Output Power Restriction Chart

Total power of this unit is restricted by limiting current of each output. Total power of each output power (voltage times current) shall follow the condition from 1 to 4 below.

1. Max. output current/Power 1 specified by Output specification shall be within "Available" area (bold line area) of Fig. 1 below.
2. Max. output current/Power 2 specified by Output specification shall be within "Available" area (bold line area) of Fig. 2 below.
3. Max. output current/Power 3 specified by Output specification shall be within "Available" area (bold line area) of Fig. 3 below.
4. Instantaneous output current/Power specified by Output specification shall be within "Available" area (bold line area) of Fig. 4 below.


However, for operation under high temperature and low input voltage condition, follow the Derating Conditions on page 6.

Fig. 1 at Natural air cooling (basic structure)

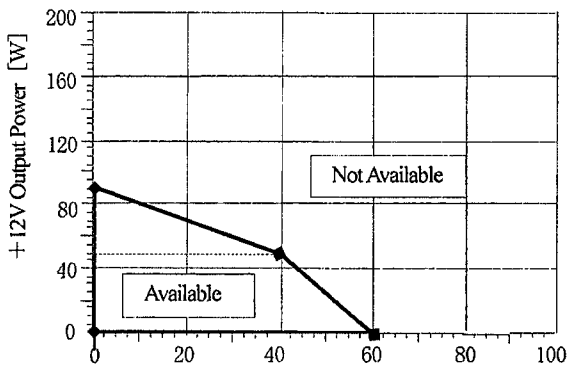


Total power of +5V, +3.3V, -12V, and +5VSB [W]

Fig. 2 at Natural air cooling with special AL-heat sink

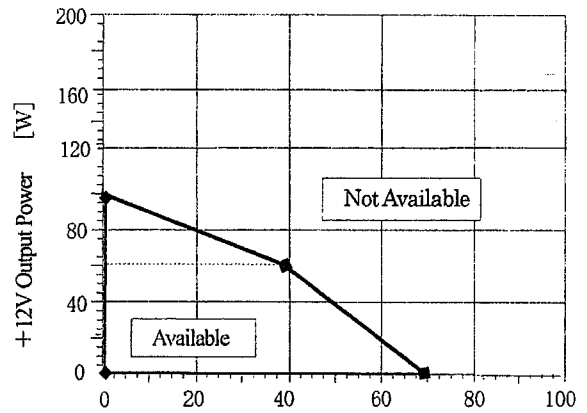


Total power of +5V, +3.3V, -12V, and +5VSB [W]

Fig. 3 at Forced air cooling with external Fan)

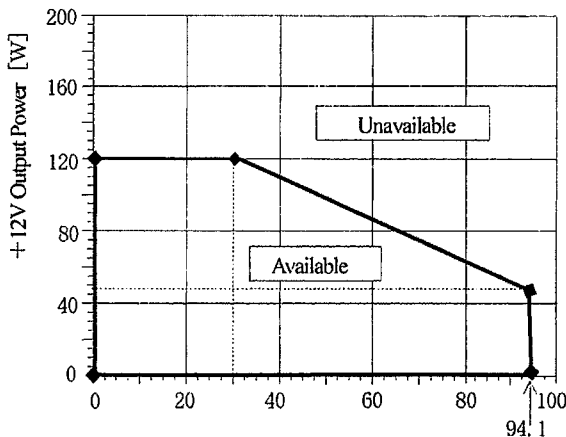


Total power of +5V, +3.3V, -12V, and +5VSB [W]

Fig. 4 at Instantaneous Rating within 5 seconds

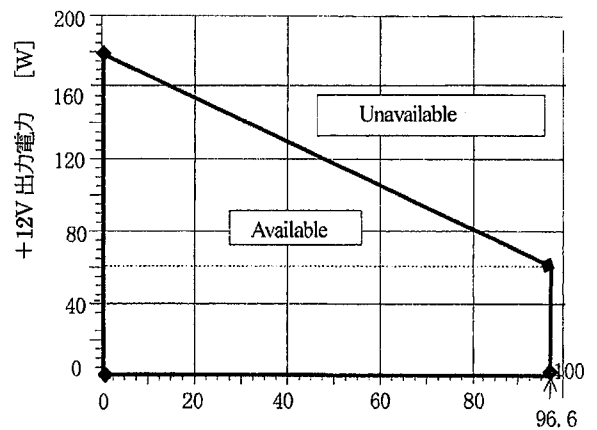

Total power of +5V, +3.3V, -12V, and +5VSB [W]




REV.	Date	Content	By	REV.	Date	Content	By
Drawn by	Checked by	Approved by	Document No.				
Shirai	Hanano	Takeda	5113-08-4-520	Sheet No. 5/8			

Product Specification


Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Nanba Technical Center

Installation

- In mounting into the system, keep 5 mm away from the PCB edge and component surface of the unit to meet insulation and dielectric voltage requirements.
- Keep sufficient space on top area to secure natural air flow under natural air cooling operation. The installation direction marked "X" below is unacceptable.

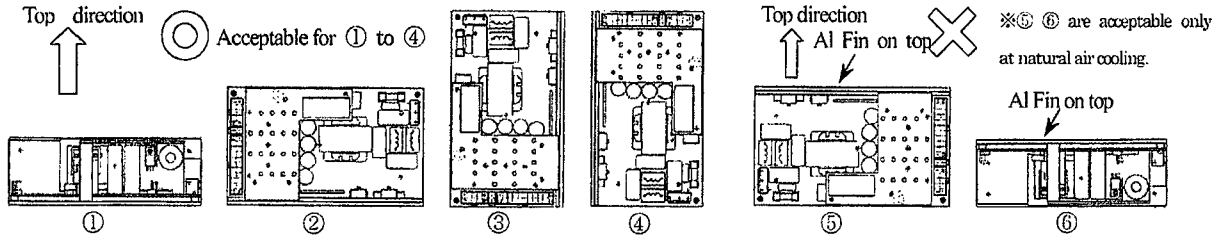

- Any directions from ① to ⑥ above are acceptable at forced air cooling operation. However, position relation with external fan shall meet (A) to (C) below. (D) is unacceptable. In addition, Fan air flow shall be 0.5m^3 per minute or larger in the "Arrow" direction below.

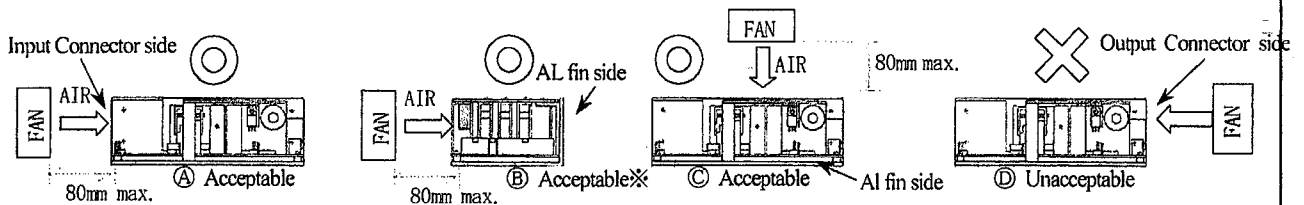

※ For (B), Fan motor shall be positioned in the middle of the lengthways direction of the Unit



Derating

In operation under high temperature and at low input voltage, derate Output current/Power following the items from 1 to 4 below. For continuous rating operation, Max. output current of each CH provided in Output specification is regarded as 100% load factor. Also, Total of max. output power of CH1 to CH5 (Note) is regarded as 100% load factor.

For instantaneous rating, as with the above, total of instantaneous output current of each CH is regarded as 100% load factor. Also, Total of instantaneous output power of CH1 to CH5 (Note) is regarded as 100% load factor.

Note: Refer to Output Power restriction chart on page 5 for total of max. output power and total of instantaneous output power of CH1 to CH5.

- In operation exceeding 25°C of ambient temperature under natural air cooling, follow the load factor indicated by the solid line in fig. 1 below for both of continuous and instantaneous rating.
- In operation exceeding 25°C of ambient temperature under forced air cooling, follow the load factor indicated by the dashed line in fig. 1 below for both of continuous and instantaneous rating.
- In operation with continuous rating at 90V input voltage or lower, follow the load factor indicated by the solid line in Fig. 2 below. In addition, when the ambient temperature exceeds 25°C , follow the load factor gained by multiplying the load factor in Fig. 2 and Fig. 1.
- For operation of instantaneous rating at 95V input voltage or lower, follow the load factor indicated by the dashed line in Fig. 2 below. In addition, when the ambient temperature exceeds 25°C , follow the load factor gained by multiplying the load factor in Fig. 2 by the load factor in Fig. 1.

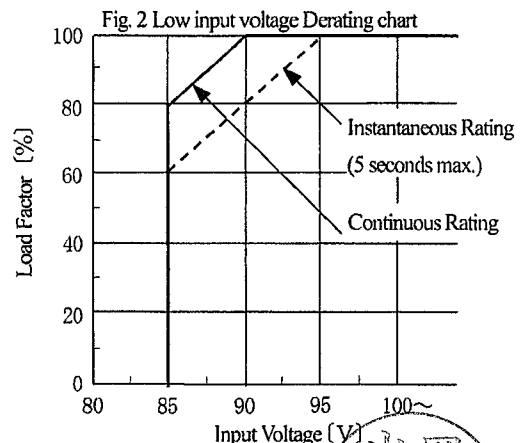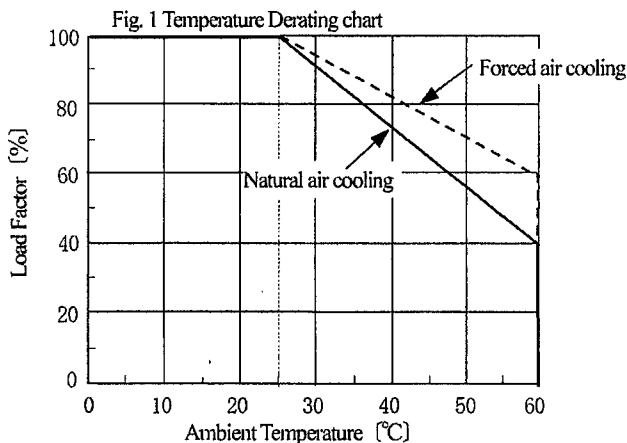

REV.	Date	Content	By	REV.	Date	Content	By	
Drawn by	Checked by	Approved by	Document No.					Sheet No.
Shirai	Hanano	Takeda	5113-08-4-520					6/8

Product Specification

Model	PCFL-180P-X2S2	Date	June 28, 2007
		Department	Narba Technical Center

Current rating table for load connection pins


Max. continuous current rating of each pin for load connection shall follow the table below. However, total current per each output shall not exceed max. output current defined in the output specification.


Connector name	Pin No.	Output (signal) name	Max. Current	Note
CN10	1	+3.3V	5.0A	
	2	+3.3V SENSING	※	※ Refer to Signal Input/Output specification.
	3	+1.2V	5.0A	
	4	+5V	5.0A	
	5	+5V	5.0A	
	6	COM. GND	5.0A	
	7	COM. GND	5.0A	
	8	COM. GND	5.0A	
	9	COM. GND	5.0A	
	10	-1.2V	5.0A	
	11	+5VSB	5.0A	
	12	+3.3V	5.0A	
	13	+3.3V	5.0A	
	14	+1.2V	5.0A	
	15	+5V	5.0A	
	16	+5V	5.0A	
	17	COM. GND	5.0A	
	18	COM. GND	5.0A	
	19	COM. GND	5.0A	
	20	COM. GND	5.0A	
	21	PWR_OK	※	※ Refer to Signal Input/Output specification.
	22	PS-ON#	※	※ Refer to Signal Input/Output specification.
CN11	1	+3.3V	5.0A	
	2	+5V	5.0A	
	3	COM. GND	5.0A	
	4	COM. GND	5.0A	
	5	+1.2V	5.0A	
	6	+3.3V	5.0A	
	7	+5V	5.0A	
	8	COM. GND	5.0A	
	9	COM. GND	5.0A	
	10	+1.2V	5.0A	
CN12	1	+5V	5.0A	
	2	+3.3V	5.0A	
CN13	1	BATT+	10.0A	Connecting the specific battery
	2	BATT-(COM. GND)	10.0A	Note: Please refer to the battery spec. for more details

Packaging Specification

Packaging structure: One unit is wrapped in a plastic bag and packed in individual box. 12 individual boxes are packed in a collective box in order of 6 individual boxes by two layers. Individual box and collective box material shall be cardboard.

Items	Specification	Note
Dimension/Weight	400mm (W) × 400mm (D) × 260mm (H)/13Kg	Standard weight per each collective box containing 12 individual boxes.
Number of piles	Max. three piles from the bottom to the top	One collective box shall be regarded as one layer.
Vibration	To endure the vibration acceleration of 0.75g _n with vibration frequency of 5 to 50Hz (Logarithm sweeping) and in upward and downward vibration for 40 minutes.	JIS Z 0200 compliant (Less than 2,000Km distance in a motor truck)
Fall Impact	To endure the free fall from the height of 35 cm.	JIS Z 0200 compliant (Distribution condition: Level III)

		Nov.16.2007	CN13 added	"J-191131"	Takeda						
REV.	Date	Content			By	REV.	Date	Content			By
Drawn by	Checked by	Approved by	Document No.					Sheet No.			
Shirai	Hanano	Takeda	5113-08-4-520A					7/8			

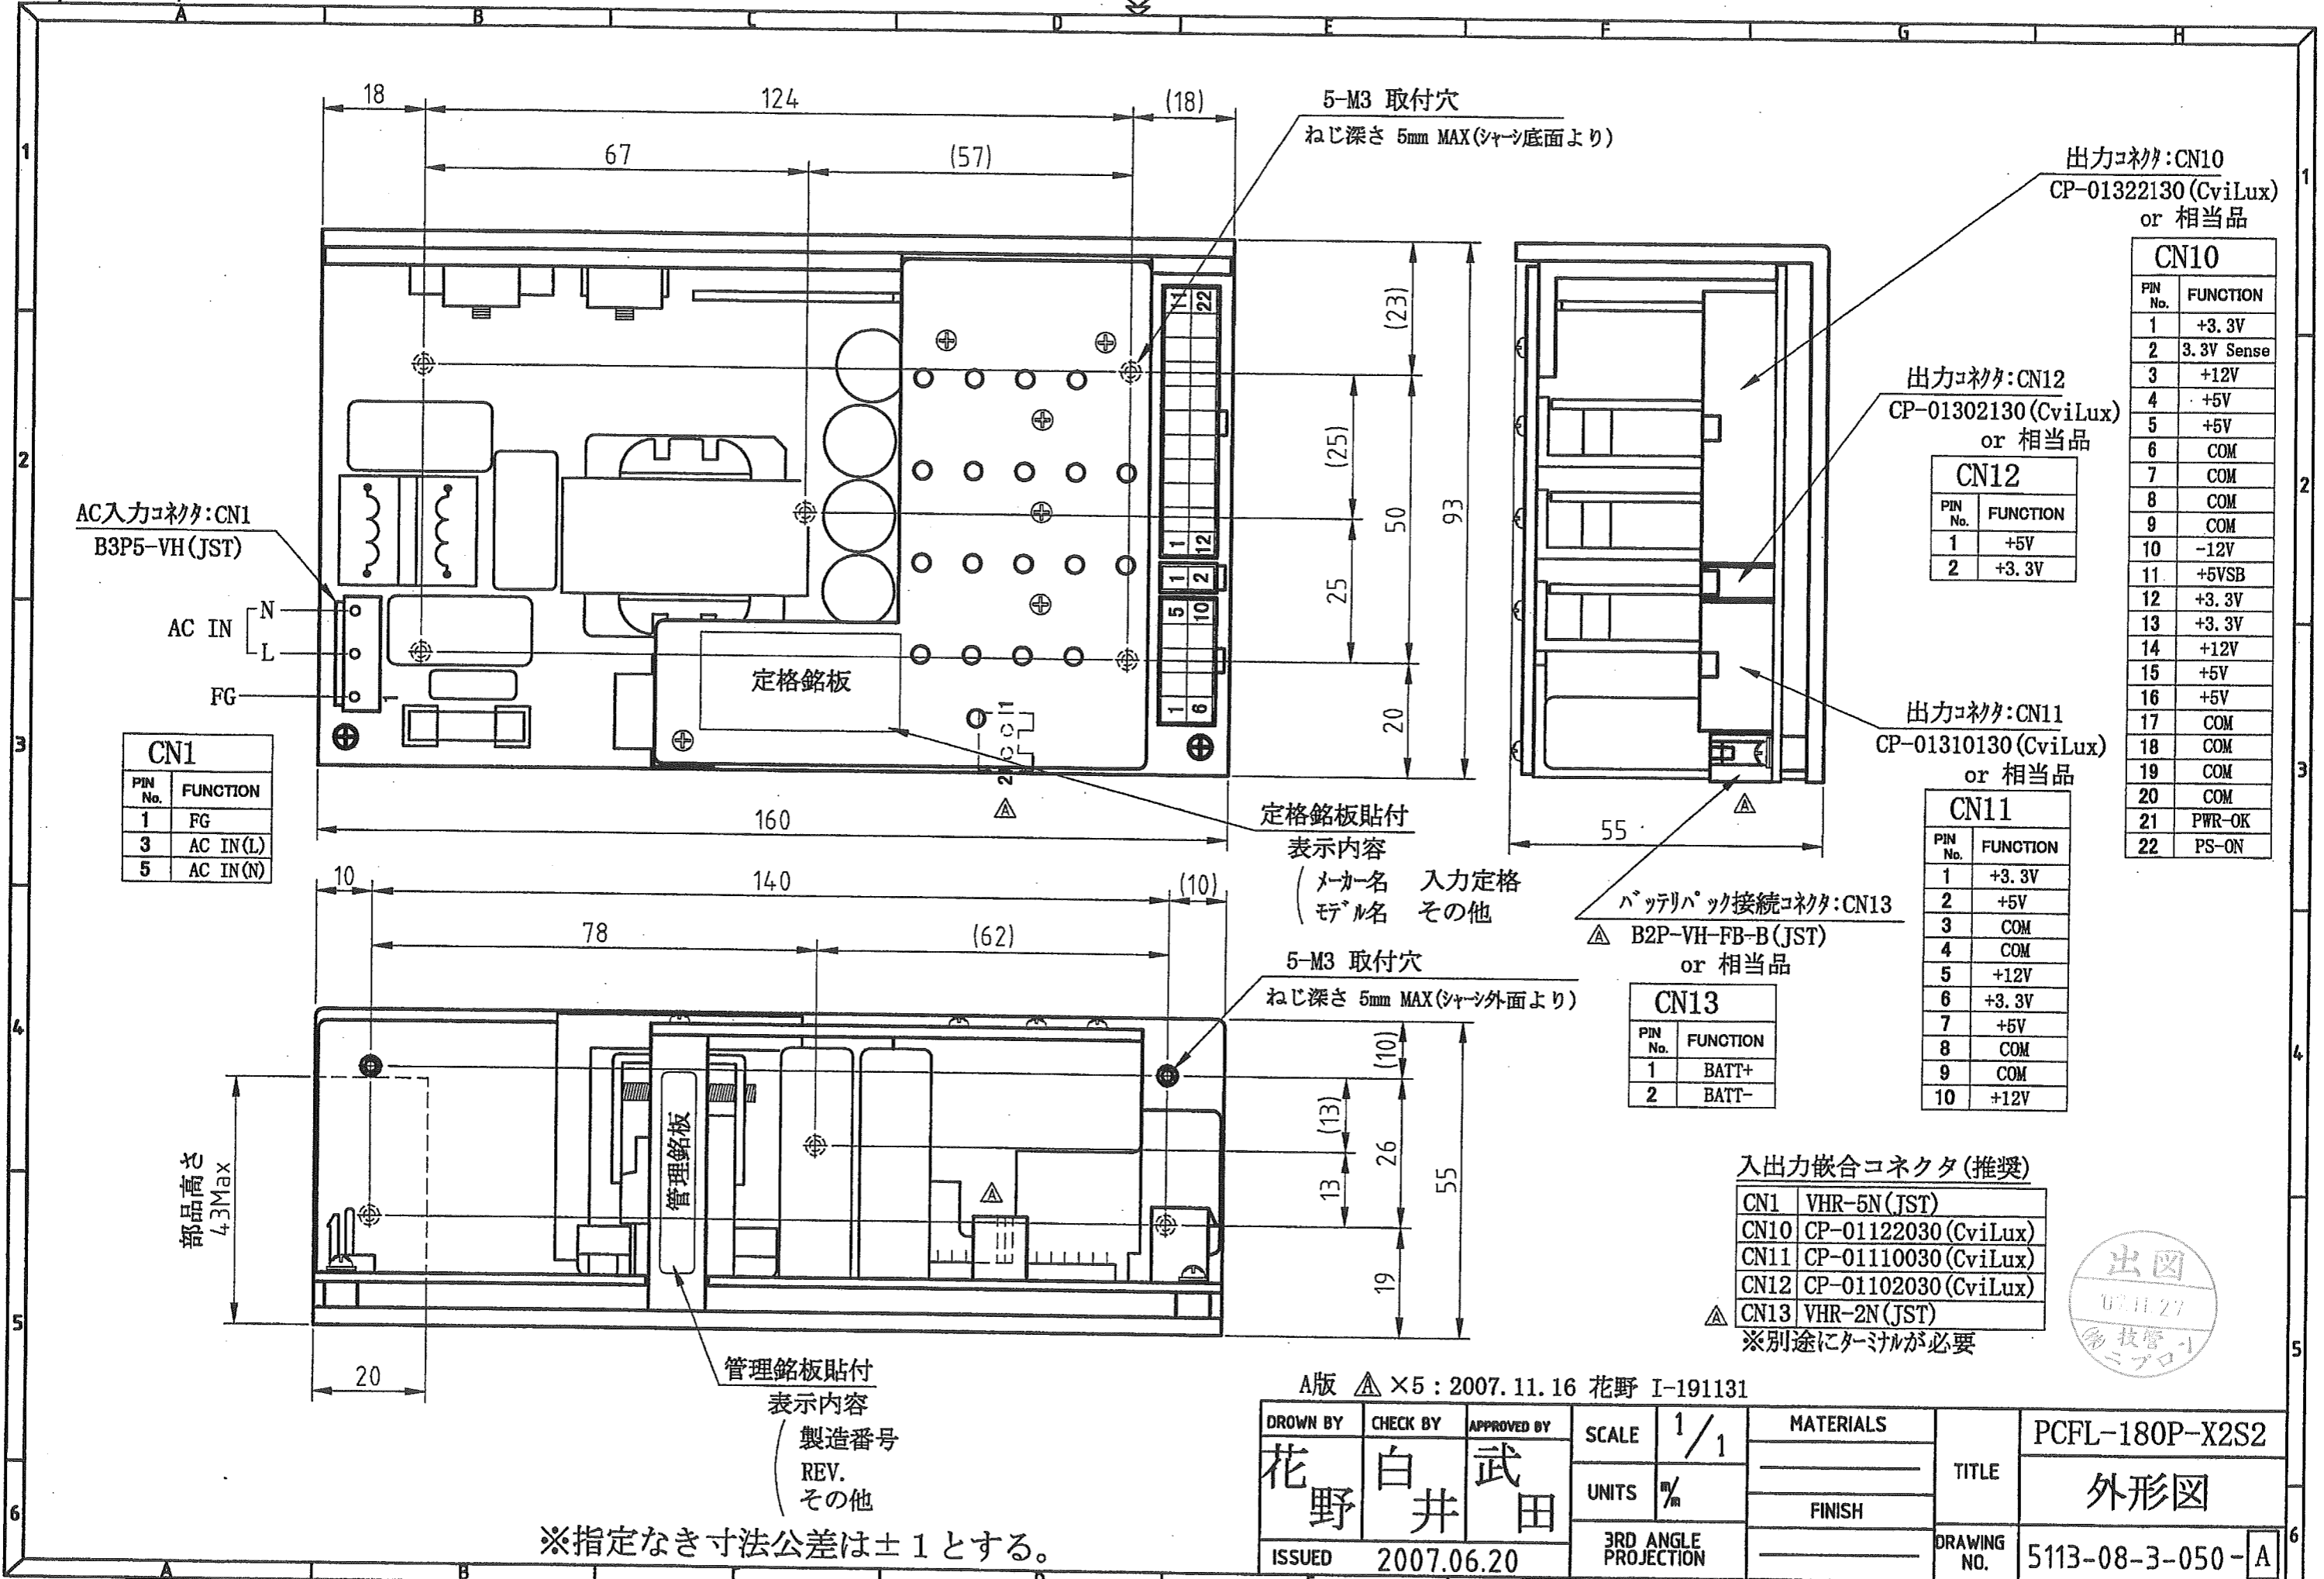

AC入力コネクタ: CN1
B3P5-VH (JST)

CN1	
PIN No.	FUNCTION
1	FG
3	AC IN(L)
5	AC IN(N)

AC IN
N
L
FG

定格銘板

5-M3 取付穴
ねじ深さ 5mm MAX (シャーシ底面より)

定格銘板貼付
表示内容
メーカー名 入力定格
モデル名 その他

5-M3 取付穴
ねじ深さ 5mm MAX (シャーシ外面より)

管理銘板貼付
表示内容
製造番号
REV.
その他

※指定なき寸法公差は±1とする。

出力コネクタ: CN10
CP-01322130 (CviLux)
or 相当品

CN10	
PIN No.	FUNCTION
1	+3.3V
2	3.3V Sense
3	+12V
4	+5V
5	+5V
6	COM
7	COM
8	COM
9	COM
10	-12V
11	+5VSB
12	+3.3V
13	+3.3V
14	+12V
15	+5V
16	+5V
17	COM
18	COM
19	COM
20	COM
21	PWR-OK
22	PS-ON

出力コネクタ: CN12
CP-01302130 (CviLux)
or 相当品

CN12	
PIN No.	FUNCTION
1	+5V
2	+3.3V

出力コネクタ: CN11
CP-01310130 (CviLux)
or 相当品

CN11	
PIN No.	FUNCTION
1	+3.3V
2	+5V
3	COM
4	COM
5	+12V
6	+3.3V
7	+5V
8	COM
9	COM
10	+12V

バッテリーパック接続コネクタ: CN13
△ B2P-VH-FB-B (JST)
or 相当品

CN13	
PIN No.	FUNCTION
1	BATT+
2	BATT-

入出力嵌合コネクタ (推奨)

CN1	VHR-5N (JST)
CN10	CP-01122030 (CviLux)
CN11	CP-01110030 (CviLux)
CN12	CP-01102030 (CviLux)
△ CN13	VHR-2N (JST)

※別途にターミナルが必要



A版 △ × 5 : 2007. 11. 16 花野 I-191131

DRAWN BY	CHECK BY	APPROVED BY	SCALE	1/1	MATERIALS	TITLE	PCFL-180P-X2S2
花野	白井	武田	UNITS	mm	FINISH		
ISSUED	2007.06.20		3RD ANGLE PROJECTION		DRAWING NO.	5113-08-3-050-A	