


This specification applies to MAIN POWER CABLE, Model name: WH-M2424-500.


General Specification

Items	Specification	Measurement, etc.	
Environment	Operating Temperature	0 to 70 °C	Temperature gradient: 15 °C /H
	Storage Temperature	-25 to 70 °C	Temperature gradient: 15 °C /H
	Relative Humidity	10 to 95%	No condensation
Others	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated with rated Input/output at normal temperature and humidity.
	Environmental consciousness	RoHS compliant	

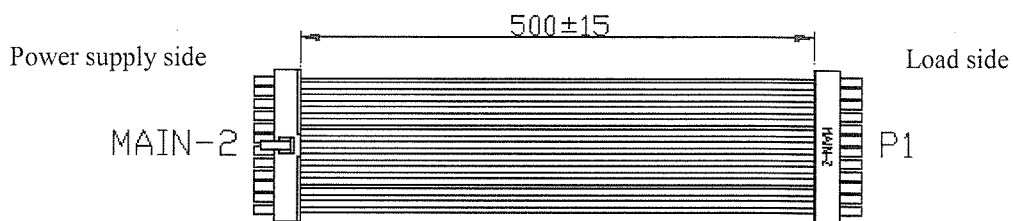

Rated current / Outline / Dimension etc.

MAIN-2				P1				
CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE		CONNECTOR TYPE	
					COLOR	TYPE		
Housing: CP-01124030 (CviLux) Terminal: 13PIN CP-01100105 (CviLux) Other CP-01100102 (CviLux) or equivalent	13	1	4.8A	+3.3V	ORANGE	UL1007 AWG #18	Housing: CP-01124030 (CviLux) Terminal: 13PIN CP-01100105 (CviLux) Other CP-01100102 (CviLux) or equivalent	
	2	2	4.8A	+3.3V	ORANGE			
	3	3	4.8A	COM	BLACK			
	4	4	4.8A	+5V	RED			
	5	5	4.8A	COM	BLACK			
	6	6	4.8A	+5V	RED			
	7	7	4.8A	COM	BLACK			
	8	8	4.0A	PWR_OK	GRAY			UL1007 AWG #20
	9	9	4.8A	+5VSB	VIOLET			
	10	10	4.8A	+12V	YELLOW			
	11	11	4.8A	+12V	YELLOW			
	12	12	4.8A	+3.3V	ORANGE			
	1	13	4.8A	+3.3V SENSE	ORANGE	UL1007 AWG #18		
	13			+3.3V	ORANGE			
	14	14	4.8A	-12V	BLUE	UL1007 AWG #20		
	15	15	4.8A	COM	BLACK			
	16	16	4.0A	ON/OFF	GREEN	UL1007 AWG #20		
	17	17	4.8A	COM	BLACK	UL1007 AWG #18		
	18	18	4.8A	COM	BLACK			
	19	19	4.8A	COM	BLACK			
	20	20	-	N.C.	-	-		
	21	21	4.8A	+5V	RED	UL1007 AWG #18		
	22	22	4.8A	+5V	RED			
	23	23	4.8A	+5V	RED			
24	24	4.8A	COM	BLACK				



Note
* Packaging
The output harness shall be packed and delivered in a box separately from power supply unit after the harness is packed in a plastic bag with a label showing Model name on it.

Drawn by Yodo	Checked by 	Approved by 	Model name WH-M2424-500	Drawing No. 2784-03-4-520	1 / 1
------------------	----------------	-----------------	----------------------------	------------------------------	-------