

Product specification

Date: Feb. 9th 2017

Scope
 This specification applies to embedded DC stabilized power supply, model PC2U-530P-X2S.
 All items in the specification shall be provided at normal temperature and humidity unless otherwise specified.

General Specification

Items		Specification	Measurement conditions, etc.
AC input	Rated voltage	AC100 to 240V	Worldwide range Load factor shall be 90 to 100% at AC85 to 90V.(Refer to output specification)
	Voltage range	AC85 to 264V	
	Rated frequency	50/60 Hz	Range 47 to 63Hz
	Inrush current	31Apeak max. at AC100V 75Apeak max. at AC240V	At cold start(25°C) with rated output
	Input VA	581VA max. at AC100V 562VA max. at AC240V	At rated input and continuous max. output power
		815VA max. at AC100V 786VA max. at AC240V	At rated input and peak output power
	Efficiency	75% typical at AC100V / 77% typical at AC240V	Load factor 70%
Power factor	99% typical at AC100V / 94% typical at AC240V		
Environment	Operating temperature	0 to 60°C	Temperature gradient: 15°C/H The load factor shall be 100 to 70% at 45 to 60°C(Refer to output specification)
	Storage temperature	-25 to 70°C	Temperature gradient: 15°C/H
	Relative humidity	10 to 90% at operation 10 to 95% at no operation	No condensation
	Vibration	To endure in each direction of X,Y, and Z under the condition of a rate of acceleration 2G, 10 to 55 Hz of vibration, and 10 sweep cycles for 45min.	To follow JIS-C-60068-2-6 at no operation
	Surface drop	Lift one edge with opposite edge placed on the table 50mm high and let it fall. Repeat three times for four edges. There shall be no malfunction observed.	To follow JIS-C-60068-2-31 at no operation


Note:



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: PC2U-530P-X2S	Drawing No. 2979-01-4-520
------------------	----------------------	-------------------------	-------------------------	------------------------------

Product specification

Date: Feb. 9th 2017

Items		Specification	Measurement conditions, etc.
Insulation	Dielectric strength	AC 1500V for one minute between AC input and FG/DC output	
	Insulation resistance	50MΩ min. between AC input and FG/DC output	At DC 500V
	Leakage current	0.5mA max. at AC100V 1mA max. at AC200V	YEW.TYPE3226(1kΩ) or equivalent
Others	Electrostatic discharge	Contact discharge : ±6kV, 10 times	No malfunction or defect shall be observed. IEC61004-4-2(test level 3) compliant
	Line noise immunity	±2000V(Pulse width of 100/1000nS, repetitive cycle of 30 to 100Hz, Normal/Common mode with Positive/Negative polarity for 10 minutes)	To measured with INS-410 There shall be no DC-component fluctuation in output and malfunction.
	Surge immunity	Common mode ±2kV, Normal mode ±1kV, Pulse width 1.2×50μS, 5 times respectively	No malfunction or defect shall be observed. IEC-61000-4-5(Installation environment class3) compliant
	Conducted emission	VCCI Class B, FCC Class B, and EN55022 Class B compliant	To be measured on the single power supply
	Harmonic current	IEC61000-3-2(Ed.2.1) Class D, EN61000-3-2(A14) Class D compliant	At rated input and rated load
	Safety standard	UL60950-1, CSA60950-1(c-UL), CCC IEC60950-1 	
	Cooling system	Forced air cooling by internal fan. To control fan speed by detecting internal temperature of power supply.	Fan speed changes according to operating temp. and load condition.(Note 1)
	Reliability grade	FA	To follow our standard
	Weight	1.68kg typical	
Warranty	Three years after delivery. If detects belong to us, the defective unit shall be repaired or replaced at our cost.	The unit shall be operated at normal temperature and humidity.	

Note:

Note 1: The fan speeds low only when the internal temperature of the power supply goes high while the power supply stops operation due to PS_ON# signal.




AX1:2020.10.05 M.Okudaira

Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	PC2U-530P-X2S	Drawing No.	2979-01-4-520 A
									2/8

Output specification								
Items		CH1	CH2	CH3	CH4	CH5 (5VSB)	Measurement conditions, etc.	
Output rating	Rated voltage	3.3V	5V	12V	-12V	5V		
	Min. current	0A	0A	0A	0A	0A	Min. load current to secure voltage regulation	
	Rating	Rated current	13A	18A	21A	0.5A	2A	Total rated power:401W
		Rated power	43W	90W	252W	6W	10W	
	Continuous max.	Max. current	20A	22A	22A	0.5A	2A	Total continuous max. power:401W
		Continuous max. power	160W max.		264W max.	6W	10W	
			385W max.					
	Peak rating	Max. current	30A	33A	30A	0.5A	2.5A	Total peak power:530.5W Peak period shall be 5 sec. max. and its duty ratio shall be 10% max.(Refer to the figure below.)
		Peak power	200W max.		360W max.	6W	12.5W	
			512W max.					


Output derating vs Ambient temperature

When ambient temp. near air intake opening exceeds 45°C, follow the derating curve below to reduce rated current/power, continuous max. current/power, and peak current/power.

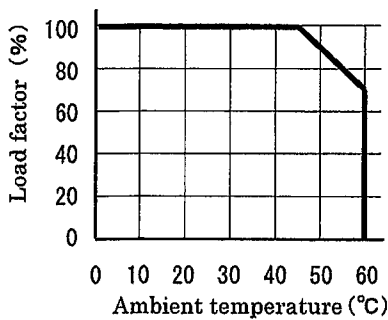


Output derating vs Input voltage

When input voltage is AC 90V or less, follow the derating curve below to reduce rated current/power, continuous max. current/power, and peak current/power.



Duty ratio of Peak current/power

Peak current/power shall be 5 seconds max. and its duty ratio shall be 10% max.

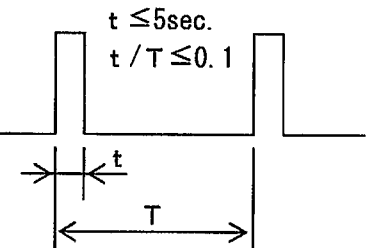

Note:



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	PC2U-530P-X2S	Drawing No.	2979-01-4-520
									3/8

Product specification

Date: Feb. 9th 2017

Items		CH1	CH2	CH3	CH4	CH5	Measurement conditions, etc.	
Output characteristics	Total voltage regulation (%)	±4 max.	±4 max.	±5 max.	±5 max.	±5 max.	Total regulation of temperature, Input and load current	
	Max. ripple voltage(mV _{p-p})	50 max.	50 max.	120 max.	120 max.	50 max.	Connect two wires to output connector with a 10μF electrolytic capacitor and a 0.1μF ceramic capacitor connected to the other ends to measure.	
	Max. spike voltage(mV _{p-p})	100 max.	100 max.	170 max.	170 max.	100 max.		
	Rise time	0.1 ms min. 20ms max.					The time for output voltage to rise from 10% to 95%	
Protection	OCP	OCP point (A)	31 min.	34 min.	31 min.	105% min. of peak current		Rated load for all other outputs. At rated input.
		Method	All outputs except CH5 shut down			Hold-down current limiting	Same as CH1 to 3	
		Recovery	Reclosing AC input or, PS_ON# signal "OPEN" or "H" to "L"			Automatic recovery		
	OVP	OVP point (V)	3.76 to 4.3	5.74 to 7.0	13.4 to 15.6	—	—	
		Method	All outputs except CH5 shut down			—	—	
		Recovery	Reclosing AC input or, PS_ON# signal "OPEN" or "H" to "L"			—	—	

Note:




Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	PC2U-530P-X2S	Drawing No.	2979-01-4-520
									4/8

Input/Output signal specification		
Items	Specification	Circuit
Input signal	Output ON/OFF control signal(PS_ON#) CH1 to CH4 shut down at 'H' or 'OPEN' input	
	+3.3V SENSE	Input terminal for voltage detection of CH1(+3.3V); voltage drop of +side output cable is compensated when connected to load end.
Output signal	Normal output signal (PWR_OK) 'H' is delivered at normal output. (Detection delay time: 100 to 500ms)	
	Fan monitoring signal (FAN M)	Two pulses per rotation of individual motors are delivered.
Note:		



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	PC2U-530P-X2S	Drawing No.	2979-01-4-520
									5/8

Input/Output signal specification

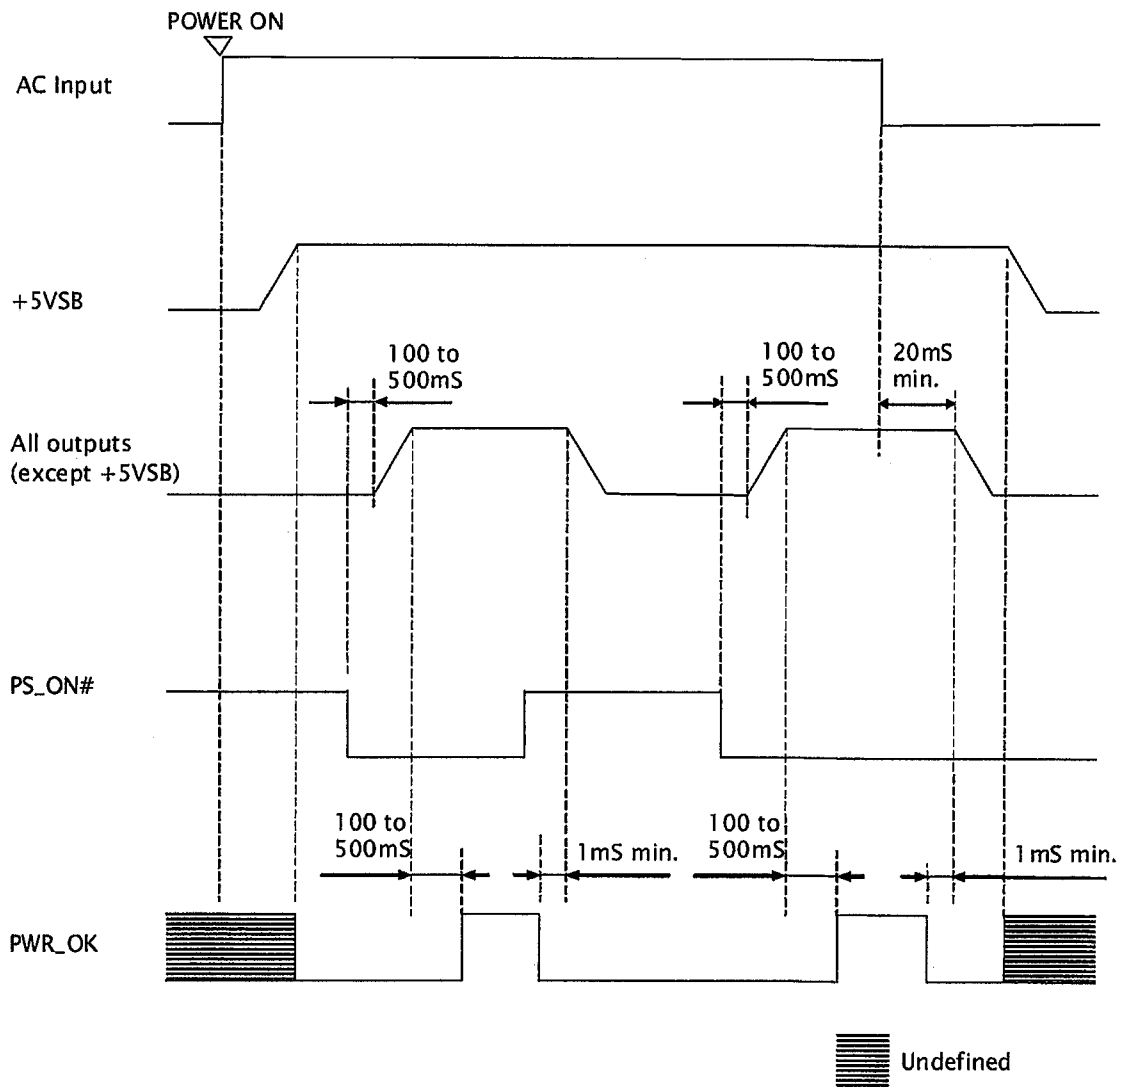

Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: PC2U-530P-X2S	Drawing No. 2979-01-4-520
------------------	----------------------	-------------------------	-------------------------	------------------------------


Output connector acceptable current

Acceptable current for each pin of output connectors shall follow the table below. However, total current per each output shall not exceed the max. current specified in the output specification.

Connector	Pin No.	Output(signal)	Max. current
MAIN	1	+3.3V SENSE	10mA
	2	+3.3V	6.0A
	3	GND	6.0A
	4	+5V	6.0A
	5	GND	6.0A
	6	+5V	6.0A
	7	GND	6.0A
	8	PWR_OK	5mA
	9	+5VSB	2.5A
	10	+12V	6.0A
	11	+12V	6.0A
	12	+3.3V	6.0A
	13	+3.3V	6.0A
	14	-12V	0.5A
	15	GND	6.0A
	16	PS_ON#	1mA
	17	GND	6.0A
	18	GND	6.0A
	19	GND	6.0A
	20	NC	—
	21	+5V	6.0A
	22	+5V	6.0A
	23	+5V	6.0A
	24	GND	6.0A

Connector	Pin No.	Output(signal)	Max. current
12V	1	GND	7.0A
	2	GND	7.0A
	3	GND	7.0A
	4	GND	7.0A
	5	+12V	7.0A
	6	+12V	7.0A
	7	+12V	7.0A
	8	+12V	7.0A
HD	1	+3.3V	7.0A
	2	+5V	7.0A
	3	GND	7.0A
	4	GND	7.0A
	5	+12V	7.0A
	6	+3.3V	7.0A
	7	+5V	7.0A
	8	GND	7.0A
	9	GND	7.0A
	10	+12V	7.0A
SIG	1	NC	—
	2	NC	—
	3	NC	—
	4	NC	—
	5	FAN M	5mA
	6	PS_ON#	1mA
	7	GND	2.0A
	8	+3.3V SENSE	10mA
	9	NC	—
	10	+5VSB	2.0A

(Note)
 +3.3V SENSE is provided on 1 pin of MAIN connector and 8 pin of SIG connector.
 When both pins are used, 8 pin of SIG connector has the priority to detect.
 When 8 pin of SIG connector is not connected, 1 pin of MAIN connector works for detection.



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: PC2U-530P-X2S	Drawing No. 2979-01-4-520
------------------	----------------------	-------------------------	-------------------------	------------------------------

Precaution before use

1. Grounding ⚠Warning

This unit is designed and manufactured as Class I equipment.
For safety, make sure to connect the earthing terminal to the ground before use.

2. Electric shock ⚠Warning

This unit is designed and manufactured as embedded type equipment.
As high-voltage part exists inside, make sure to mount the unit properly onto the system to avoid electric shock.

3. Output shortage ⚠Caution

Do not get output terminals shorted. When shorted, internal capacitors discharge at once to cause serious accident due to spark, etc. resulting in shortening lifetime of this unit.

4. Inrush current limiting circuit ⚠Caution

Power thermistor is used to limit surge current to smoothing capacitors when AC input is turned on. When AC input is turned on shortly after AC input is turned off, excess surge current may flow as the power thermistor is still hot.
Make sure to turn on AC input 60 seconds or longer after AC input is turned off.

5. Acoustic noise at power on

Low frequency acoustic noise may be heard at turn-on of input or power-on by Remote ON/OFF signal. This noise is caused by low frequency transient vibration of choke coils for harmonic measures. This will not affect performance or lifetime at all.

6. Output cable handling

Do not grab only output cables to move or carry this unit.
Make sure to hold the main body while moving or carrying.



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	PC2U-530P-X2S	Drawing No.	2979-01-4-520
									8/8