


Scope: This specification applies to USB CABLE, WH2967.

General Specification

Items		Specification	Measurement condition, etc.
Environment	Operation temp.	0 to 70°C	Temp. gradient 15°C/H
	Storage temp.	-25 to 70°C	Temp. gradient 15°C/H
	Relative humidity	10 to 95%	No condensation
Others	Warranty	1 year after delivery. If any defects belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp. and humidity, and rating.
	For environment	RoHS compliant	

Rated current, Shape, dimension, etc.

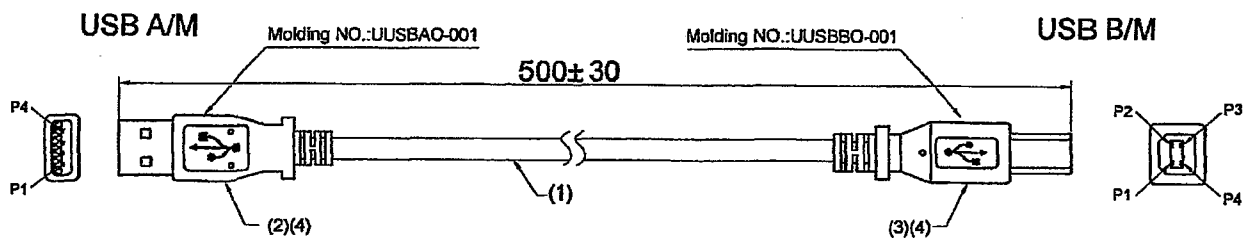

ITEM	PART	DESCRIPTION
4	PVC	PVC 50P Color:Black(Color Code:J21)
3	CONN	USB B/M Terminal Gold Plated 30U*(Contact Side) Shell Ni Plated White Housing
2	CONN	USB A/M Terminal Gold Plated 30U*(Contact Side) Shell Ni Plated White Housing
1	CABLE	USB 2.0 UL 2725 28AWG*1P+24AWG*2C+AL+D+B OD=4.5mm Color:Black Non-migration(Color Code:J21)

PIN OUT			
USB A/M		USB B/M	
1	Red	1	Twisted pair
2	White	2	
3	Green	3	
4	Black	4	
Shell	Drain+Braid	Shell	

Electrical testing:

1. Open/Short/Interrmitter: 100% testing;
2. Hi-pot: 300V/0.1S/5mA;
3. Insulation resistance: DC 250V 20mΩ (min);
4. Contact resistance: 5Ω (max).

Note

About Packaging  
Output harness shall be packed in plastic bag with model label, and packed in a box separately with power supply unit.



Due to the technical improvement, the specifications and functions are subject to change without notice.

Drawn by	Yodo	Checked by		Approved by		Model:	WH2967	Drawing No.	2967-01-4-520
----------	------	------------	--	-------------	--	--------	--------	-------------	---------------