


This specification applies to output cable Model: WH-C06VH-500-03

General Specification

Items		Specification	Measurement condition, etc.
Environ ment	Operation temp.	-10 to 70°C	Temp. gradient 15°C/H
	Storage temp.	-25 to 70°C	Temp. gradient 15°C/H
	Relative humidity	10 to 95%	No condensation
Others	Warranty	1 year after delivery. If any defects belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp. and humidity, and rating.
	For environment	RoHS compliant	


Shape, dimension, etc.

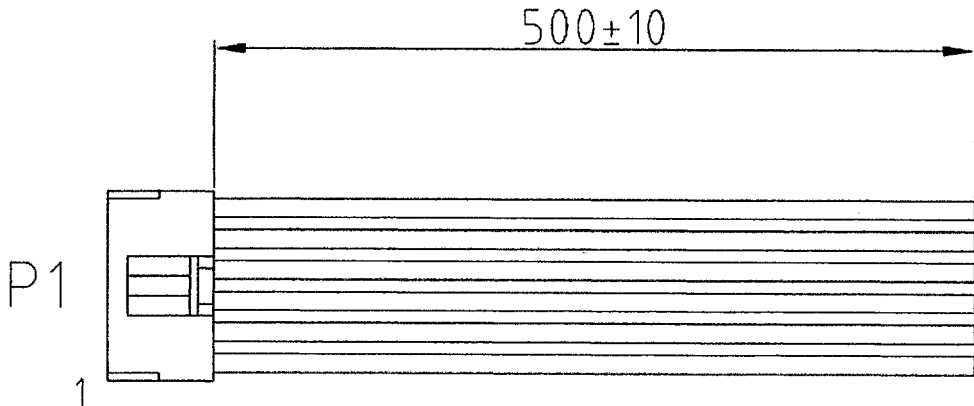

CN NAME	CONNECTOR TYPE	PIN No.	WIRE	
			COLOR	TYPE
P1	Housing: VHR-6N (JST) Terminal: SVH-21T-P1.1 (JST) or equivalent	1	BLACK	UL1015 AWG#18
		2	BLACK	
		3	BLACK	
		4	RED	
		5	RED	
		6	RED	

Note

About Packaging  
Output harness shall be packed in plastic bag with model label, and packed in a box separately with power supply unit.



Drawn by <i>Ishibashi</i>	Checked by <i>Yamada</i>	Approved by <i>Yamamoto</i>	Model: WH-C06VH-500-03	Drawing No. 3431-91-4-520
------------------------------	-----------------------------	--------------------------------	---------------------------	------------------------------